




形式	SCF-LEDN998N-APL
----	------------------



光源	LED
定格光束	2180 lm

器具効率	100.0 %
下方効率	100.0 %
上方効率	0.0 %

最大取付間隔		
A断面	0.4	H
C断面	1.1	H
B断面	1.1	H

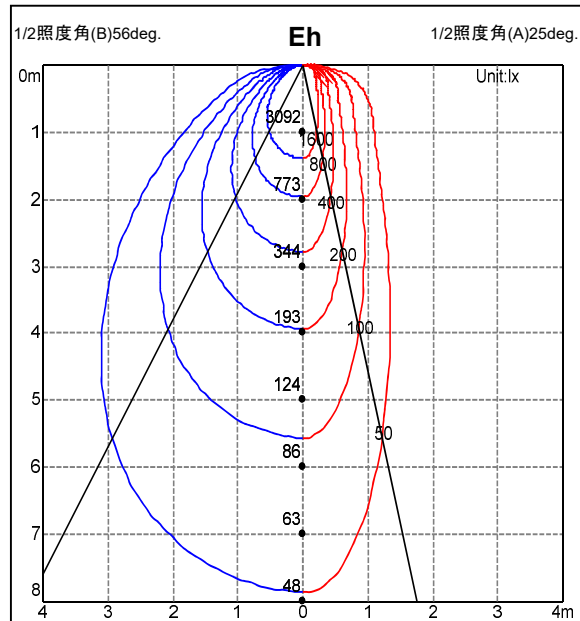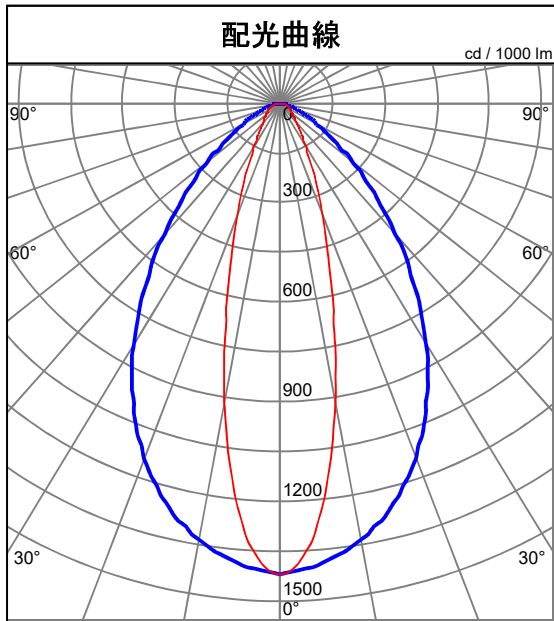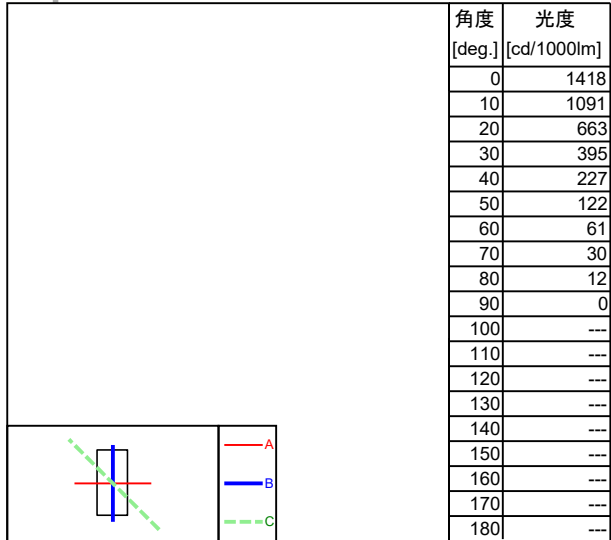

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 2180.0 / (間口 * 奥行)												
床 (%)		10												
天井 (%)		80			60			40			20			0
壁 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室 指 数	0.50	0.64	0.58	0.55	0.63	0.58	0.55	0.62	0.58	0.54	0.62	0.57	0.54	0.53
	0.70	0.83	0.79	0.75	0.82	0.78	0.75	0.81	0.78	0.75	0.80	0.77	0.75	0.74
	1.00	0.98	0.94	0.92	0.97	0.94	0.92	0.96	0.93	0.91	0.95	0.93	0.91	0.90
	1.25	1.03	1.00	0.98	1.02	0.99	0.98	1.01	0.99	0.97	1.00	0.98	0.97	0.96
	1.50	1.06	1.03	1.02	1.04	1.02	1.01	1.03	1.02	1.00	1.02	1.01	1.00	0.99
	2.00	1.08	1.07	1.05	1.07	1.05	1.04	1.06	1.04	1.03	1.04	1.03	1.02	1.01
	2.50	1.10	1.09	1.07	1.09	1.07	1.06	1.07	1.06	1.05	1.06	1.05	1.04	1.03
	3.00	1.11	1.10	1.09	1.10	1.09	1.08	1.08	1.07	1.07	1.07	1.06	1.05	1.04
	4.00	1.13	1.12	1.11	1.11	1.10	1.10	1.09	1.09	1.08	1.08	1.07	1.07	1.05
	5.00	1.14	1.13	1.13	1.12	1.11	1.11	1.10	1.10	1.09	1.08	1.08	1.08	1.06
7.00	1.15	1.14	1.14	1.13	1.12	1.12	1.11	1.11	1.10	1.09	1.09	1.09	1.07	
10.00	1.15	1.15	1.15	1.13	1.13	1.13	1.11	1.11	1.11	1.09	1.09	1.09	1.07	