

形式	TA-LED841N
----	------------





光源	
定格光束	1240 lm

器具効率	100.0 %
下方効率	92.7 %
上方効率	7.3 %

最大取付間隔			
A断面	1.2	H	
C断面	1.4	H	
B断面	1.4	H	

角度 [deg.]	光度 [cd/1000lm]
0	309
10	304
20	286
30	258
40	223
50	183
60	140
70	96
80	53
90	25
100	19
110	15
120	10
130	8
140	6
150	4
160	3
170	2
180	1

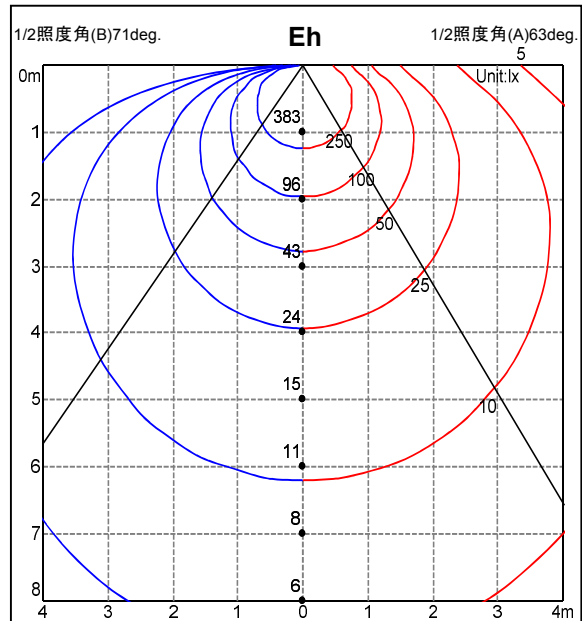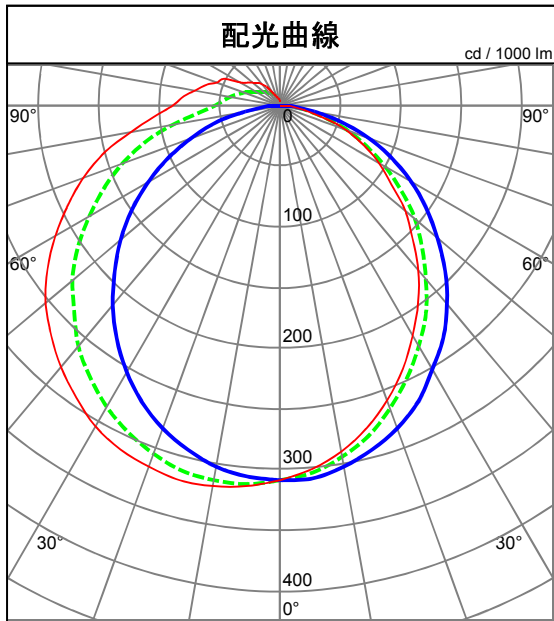

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 1240.0 / (間口 * 奥行き)																
床(%)		10																
天井(%)		80				60				40				20				0
壁(%)		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
室 指 数	0.50	0.38	0.31	0.26	0.37	0.30	0.26	0.35	0.29	0.25	0.34	0.29	0.25	0.23				
	0.70	0.53	0.45	0.40	0.51	0.44	0.39	0.49	0.43	0.39	0.47	0.42	0.38	0.36				
	1.00	0.68	0.62	0.57	0.66	0.60	0.56	0.64	0.59	0.55	0.62	0.57	0.54	0.52				
	1.25	0.77	0.71	0.67	0.75	0.70	0.66	0.72	0.68	0.64	0.70	0.66	0.63	0.61				
	1.50	0.83	0.78	0.74	0.81	0.76	0.73	0.78	0.74	0.71	0.76	0.73	0.70	0.68				
	2.00	0.91	0.87	0.84	0.88	0.85	0.82	0.85	0.83	0.80	0.83	0.80	0.78	0.76				
	2.50	0.95	0.92	0.89	0.92	0.89	0.87	0.89	0.87	0.85	0.87	0.85	0.83	0.81				
	3.00	0.97	0.95	0.93	0.94	0.92	0.90	0.92	0.90	0.88	0.89	0.87	0.86	0.84				
	4.00	1.00	0.99	0.97	0.97	0.96	0.94	0.94	0.93	0.92	0.91	0.90	0.89	0.87				
	5.00	1.02	1.01	0.99	0.99	0.98	0.96	0.96	0.95	0.94	0.93	0.92	0.91	0.88				
7.00	1.04	1.03	1.02	1.00	0.99	0.99	0.97	0.96	0.96	0.94	0.93	0.93	0.90					
10.00	1.05	1.04	1.03	1.01	1.01	1.00	0.98	0.97	0.97	0.95	0.94	0.94	0.91					