

形式	FXS2-LED990N-WP-F1		
----	--------------------	--	--





光源			
定格光束	940	lm	

器具効率	100.0	%
下方効率	96.6	%
上方効率	3.4	%

最大取付間隔			
A断面	1.4	H	
C断面	1.5	H	
B断面	1.5	H	

角度 [deg.]	光度 [cd/1000lm]
0	358
10	350
20	333
30	304
40	263
50	207
60	138
70	72
80	30
90	12
100	8
110	7
120	5
130	4
140	3
150	2
160	0
170	0
180	0

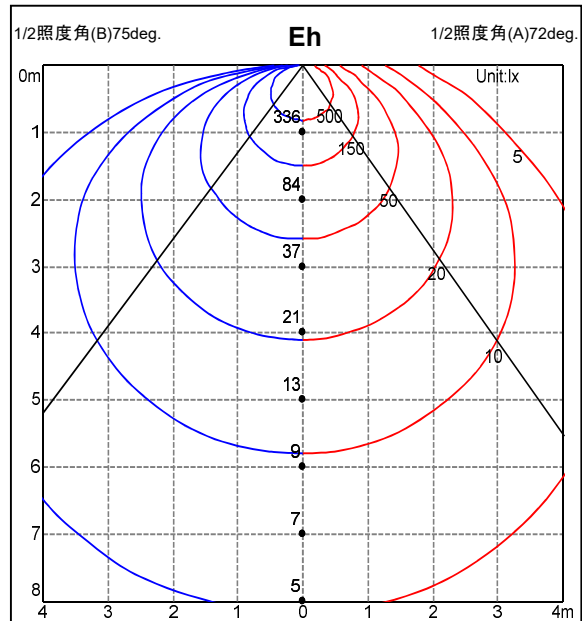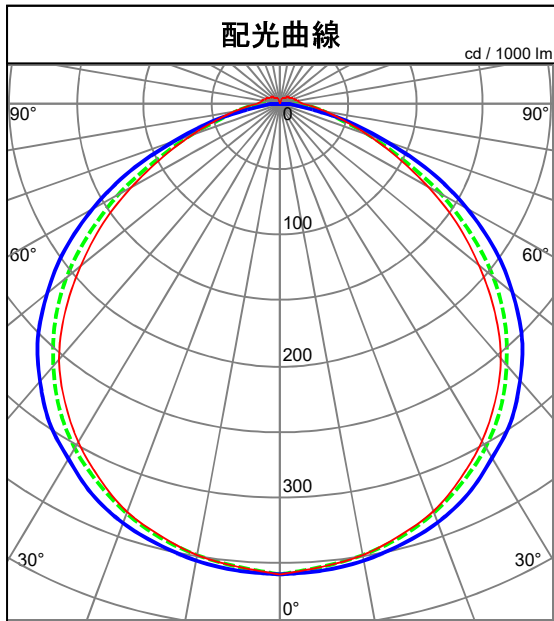

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 940.0 / (間口 * 奥行き)															
床(%)		10															
天井(%)		80				60				40				20			
壁(%)		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	
室 指 数	0.50	0.41	0.34	0.29	0.40	0.33	0.29	0.39	0.33	0.29	0.38	0.32	0.28	0.26	0.26		
	0.70	0.57	0.50	0.45	0.55	0.49	0.45	0.54	0.48	0.44	0.53	0.48	0.44	0.42	0.42		
	1.00	0.74	0.69	0.64	0.73	0.67	0.63	0.71	0.66	0.63	0.69	0.65	0.62	0.60	0.60		
	1.25	0.84	0.79	0.75	0.82	0.78	0.74	0.80	0.76	0.73	0.78	0.75	0.73	0.71	0.71		
	1.50	0.90	0.86	0.82	0.88	0.84	0.81	0.86	0.83	0.81	0.84	0.82	0.80	0.78	0.78		
	2.00	0.96	0.94	0.91	0.94	0.92	0.90	0.92	0.90	0.89	0.91	0.89	0.87	0.86	0.86		
	2.50	1.00	0.98	0.96	0.98	0.96	0.94	0.96	0.94	0.93	0.94	0.92	0.91	0.90	0.90		
	3.00	1.02	1.00	0.98	0.99	0.98	0.97	0.97	0.96	0.95	0.95	0.94	0.94	0.92	0.92		
	4.00	1.04	1.02	1.01	1.01	1.00	0.99	0.99	0.98	0.97	0.97	0.96	0.96	0.94	0.94		
	5.00	1.05	1.04	1.03	1.02	1.01	1.01	1.00	0.99	0.99	0.98	0.97	0.97	0.94	0.94		
7.00	1.06	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.98	0.98	0.97	0.95	0.95			
10.00	1.06	1.06	1.05	1.04	1.03	1.03	1.01	1.01	1.00	0.99	0.98	0.98	0.95	0.95			