

形式	TA-LED841NC
----	-------------





光源	
定格光束	1430 lm

器具効率	100.0 %
下方効率	98.6 %
上方効率	1.4 %

最大取付間隔		
A断面	1.3	H
C断面	1.5	H
B断面	1.5	H

角度 [deg.]	光度 [cd/1000lm]
0	378
10	374
20	357
30	326
40	260
50	187
60	132
70	84
80	40
90	14
100	6
110	1
120	0
130	0
140	0
150	0
160	0
170	0
180	0

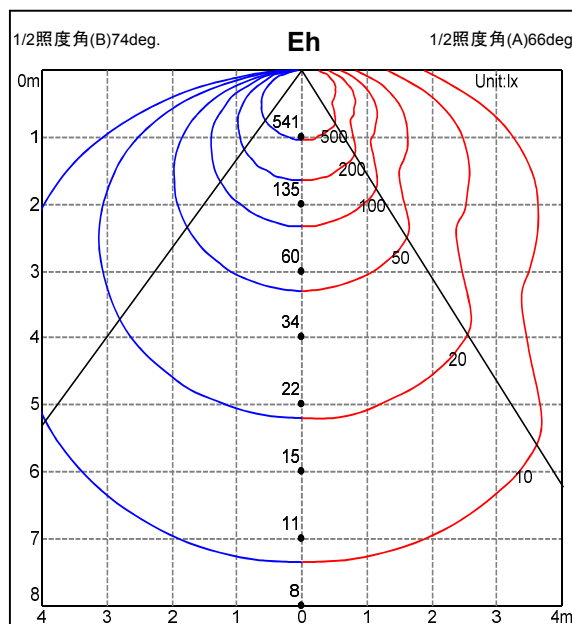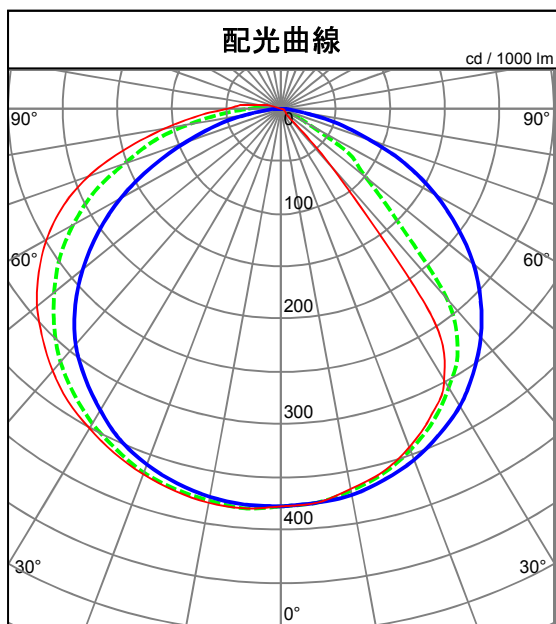

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 1430.0 / (間口 * 奥行)															
床 (%)		10															
天井 (%)		80				60				40				20			
壁 (%)		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	
室 指 数	0.50	0.43	0.36	0.32	0.42	0.36	0.31	0.41	0.35	0.31	0.40	0.35	0.31	0.29			
	0.70	0.59	0.52	0.48	0.58	0.52	0.47	0.57	0.51	0.47	0.55	0.50	0.47	0.45			
	1.00	0.76	0.70	0.65	0.74	0.69	0.65	0.73	0.68	0.64	0.71	0.67	0.64	0.62			
	1.25	0.84	0.79	0.75	0.82	0.78	0.75	0.81	0.77	0.74	0.79	0.76	0.74	0.72			
	1.50	0.90	0.86	0.82	0.88	0.84	0.82	0.86	0.83	0.81	0.85	0.82	0.80	0.78			
	2.00	0.97	0.93	0.91	0.95	0.92	0.90	0.93	0.91	0.89	0.91	0.89	0.88	0.86			
	2.50	1.00	0.98	0.96	0.98	0.96	0.94	0.96	0.95	0.93	0.95	0.93	0.92	0.90			
	3.00	1.02	1.00	0.99	1.00	0.99	0.97	0.98	0.97	0.96	0.97	0.96	0.95	0.93			
	4.00	1.05	1.03	1.02	1.03	1.01	1.00	1.01	1.00	0.99	0.99	0.98	0.97	0.95			
	5.00	1.06	1.05	1.04	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.99	0.97			
7.00	1.07	1.06	1.06	1.05	1.04	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.98				
10.00	1.08	1.07	1.07	1.06	1.05	1.05	1.03	1.03	1.03	1.01	1.01	1.01	0.99				