

形式	R-EX32WB
----	----------





光源	
定格光束	100 lm

器具効率	100.0 %
下方効率	100.0 %
上方効率	0.0 %

最大取付間隔	
A断面	0.4 H

角度 [deg.]	光度 [cd/1000lm]
0	4690
10	2504
20	641
30	187
40	66
50	32
60	18
70	10
80	3
90	0
100	---
110	---
120	---
130	---
140	---
150	---
160	---
170	---
180	---

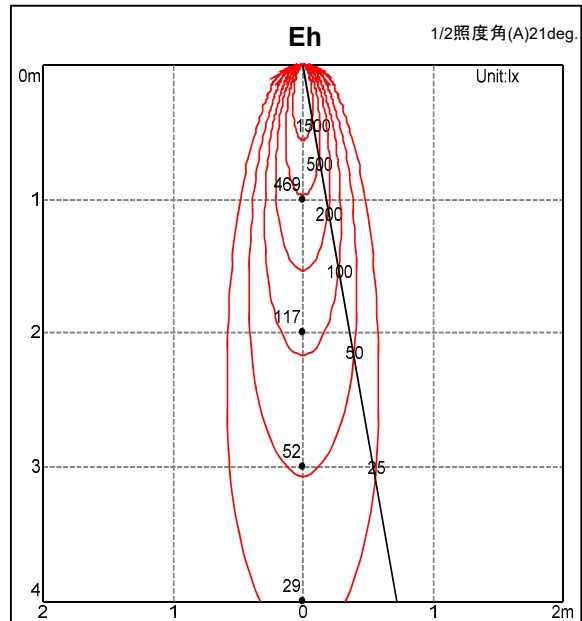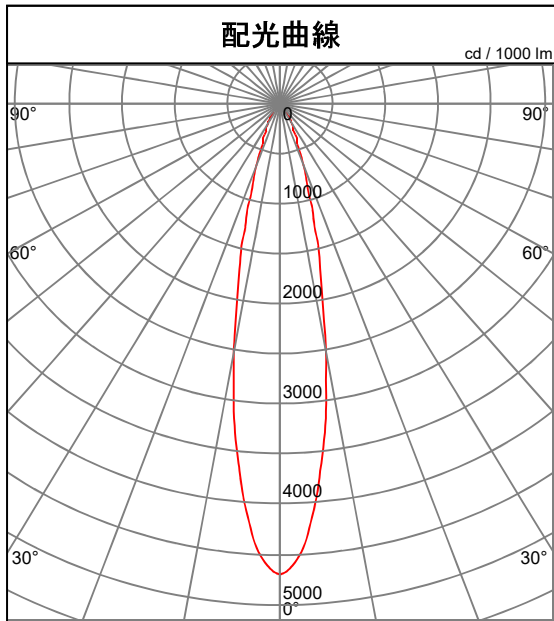

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 100.0 / (間口 * 奥行)																
床(%)		10																
天井(%)		80				60				40				20				0
壁(%)		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
室 指 数	0.50	0.74	0.70	0.68	0.73	0.70	0.68	0.73	0.70	0.68	0.73	0.70	0.68	0.72	0.69	0.67	0.67	
	0.70	0.93	0.90	0.89	0.92	0.90	0.88	0.91	0.89	0.88	0.91	0.89	0.88	0.91	0.89	0.88	0.87	
	1.00	1.02	1.01	1.00	1.01	1.00	0.99	1.01	1.00	0.99	1.00	0.99	0.99	1.00	0.99	0.99	0.98	
	1.25	1.03	1.02	1.01	1.03	1.02	1.01	1.02	1.01	1.00	1.01	1.00	1.00	1.01	1.00	1.00	0.99	
	1.50	1.03	1.02	1.01	1.02	1.01	1.00	1.01	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.99	0.98	
	2.00	1.03	1.02	1.01	1.02	1.01	1.00	1.01	1.00	0.99	1.00	0.99	0.98	0.99	0.98	0.98	0.97	
	2.50	1.04	1.03	1.02	1.03	1.02	1.01	1.01	1.01	1.00	1.00	1.00	1.00	1.00	1.00	0.99	0.98	
	3.00	1.05	1.04	1.03	1.04	1.03	1.02	1.02	1.02	1.01	1.01	1.01	1.00	1.00	1.00	1.00	0.99	
	4.00	1.07	1.07	1.06	1.06	1.05	1.05	1.04	1.04	1.03	1.03	1.02	1.02	1.02	1.02	1.02	1.01	
	5.00	1.08	1.08	1.08	1.07	1.06	1.06	1.05	1.05	1.05	1.05	1.03	1.03	1.03	1.03	1.03	1.02	
7.00	1.09	1.10	1.10	1.08	1.08	1.08	1.06	1.06	1.06	1.06	1.04	1.04	1.04	1.04	1.04	1.03		
10.00	1.10	1.10	1.11	1.08	1.08	1.08	1.09	1.06	1.07	1.07	1.04	1.05	1.05	1.05	1.05	1.03		