

形式	KN-LED1253N-E1
----	----------------





光源	
定格光束	550 lm

器具効率	100.0 %
下方効率	100.0 %
上方効率	0.0 %

最大取付間隔		
A断面	1.5 H	
C断面	1.5 H	
B断面	1.6 H	

角度 [deg.]	光度 [cd/1000lm]
0	334
10	327
20	313
30	283
40	253
50	217
60	165
70	100
80	35
90	1
100	0
110	0
120	0
130	0
140	0
150	0
160	0
170	0
180	0

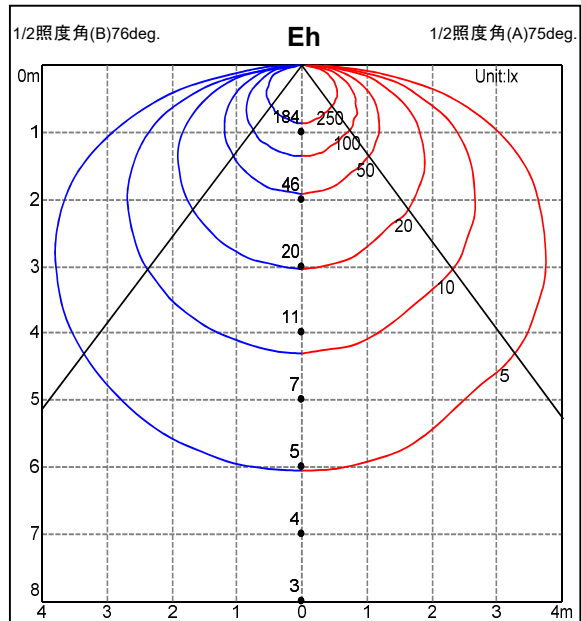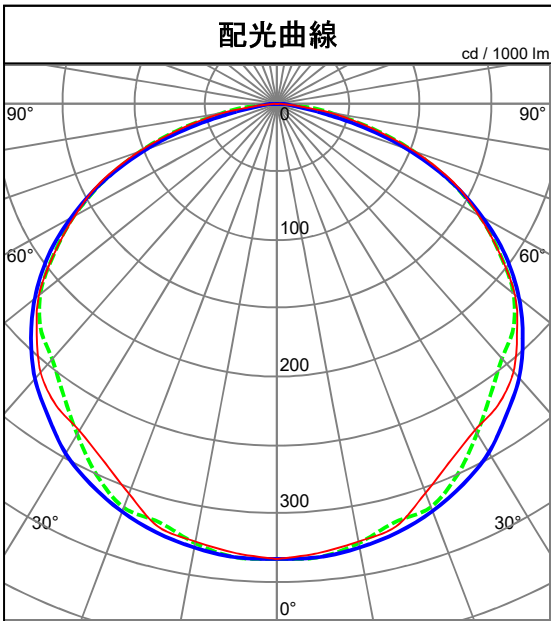

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 550.0 / (間口 * 奥行き)															
床(%)		10															
天井(%)		80				60				40				20			
壁(%)		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	
室 指 数	0.50	0.39	0.31	0.26	0.38	0.31	0.26	0.37	0.31	0.26	0.36	0.30	0.26	0.24	0.24		
	0.70	0.54	0.47	0.42	0.53	0.46	0.41	0.52	0.46	0.41	0.51	0.45	0.41	0.39	0.39		
	1.00	0.72	0.65	0.60	0.70	0.64	0.60	0.69	0.64	0.60	0.67	0.63	0.59	0.58	0.58		
	1.25	0.81	0.76	0.72	0.80	0.75	0.71	0.78	0.74	0.71	0.77	0.73	0.70	0.69	0.69		
	1.50	0.88	0.83	0.80	0.86	0.82	0.79	0.85	0.82	0.79	0.83	0.81	0.78	0.77	0.77		
	2.00	0.96	0.93	0.90	0.94	0.92	0.89	0.93	0.90	0.88	0.91	0.89	0.88	0.86	0.86		
	2.50	1.00	0.98	0.96	0.98	0.96	0.95	0.97	0.95	0.94	0.95	0.94	0.93	0.91	0.91		
	3.00	1.02	1.01	0.99	1.01	0.99	0.98	0.99	0.98	0.97	0.98	0.97	0.96	0.94	0.94		
	4.00	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.01	1.00	1.00	0.99	0.99	0.97	0.97		
	5.00	1.06	1.05	1.04	1.04	1.04	1.03	1.03	1.03	1.02	1.01	1.01	1.00	1.00	0.98	0.98	
7.00	1.07	1.07	1.06	1.05	1.05	1.04	1.03	1.03	1.03	1.02	1.01	1.01	1.01	0.99	0.99		
10.00	1.08	1.07	1.07	1.06	1.06	1.05	1.04	1.04	1.03	1.02	1.02	1.02	1.02	1.02	1.00		