

形式	TB3-LED850NHT
----	---------------





光源	
定格光束	1120 lm

器具効率	100.0 %
下方効率	99.8 %
上方効率	0.2 %

最大取付間隔			
A断面	1.6	H	
C断面	1.6	H	
B断面	1.6	H	

角度 [deg.]	光度 [cd/1000lm]
0	365
10	361
20	346
30	320
40	282
50	229
60	138
70	71
80	19
90	3
100	0
110	0
120	0
130	0
140	0
150	0
160	0
170	0
180	0

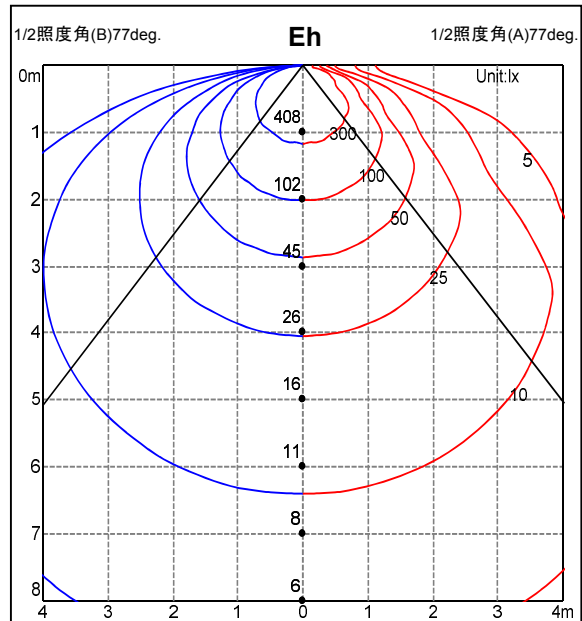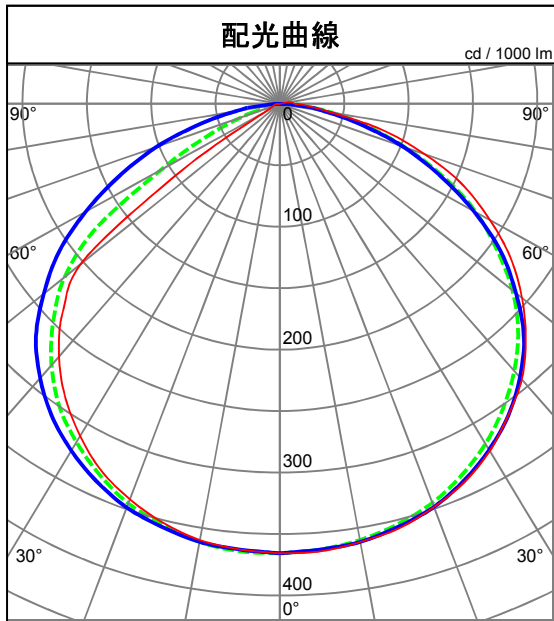

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 1120.0 / (間口 * 奥行)																
床(%)		10																
天井(%)		80				60				40				20				0
壁(%)		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
室 指 数	0.50	0.41	0.34	0.29	0.40	0.34	0.29	0.39	0.33	0.29	0.39	0.33	0.29	0.27				
	0.70	0.58	0.51	0.46	0.57	0.51	0.46	0.56	0.50	0.46	0.55	0.49	0.46	0.44				
	1.00	0.76	0.71	0.66	0.75	0.70	0.66	0.74	0.69	0.66	0.72	0.68	0.65	0.64				
	1.25	0.86	0.81	0.78	0.85	0.81	0.78	0.83	0.80	0.77	0.82	0.79	0.77	0.75				
	1.50	0.92	0.89	0.86	0.91	0.88	0.85	0.89	0.87	0.85	0.88	0.86	0.84	0.83				
	2.00	0.99	0.97	0.95	0.98	0.96	0.94	0.96	0.94	0.93	0.95	0.93	0.92	0.91				
	2.50	1.02	1.00	0.99	1.01	0.99	0.98	0.99	0.98	0.97	0.98	0.97	0.96	0.95				
	3.00	1.04	1.02	1.01	1.02	1.01	1.00	1.01	1.00	0.99	0.99	0.98	0.98	0.96				
	4.00	1.05	1.04	1.04	1.04	1.03	1.02	1.02	1.01	1.01	1.00	1.00	0.99	0.98				
	5.00	1.06	1.05	1.05	1.04	1.04	1.03	1.03	1.02	1.02	1.01	1.01	1.00	0.99				
7.00	1.07	1.06	1.06	1.05	1.04	1.04	1.03	1.03	1.02	1.01	1.01	1.01	0.99					
10.00	1.07	1.07	1.06	1.05	1.05	1.05	1.03	1.03	1.03	1.01	1.01	1.01	0.99					