

形式	FPS2-LED814N-B1
----	-----------------





光源	—
定格光束	1100 lm

器具効率	100.0 %
下方効率	100.0 %
上方効率	0.0 %

最大取付間隔		
A断面	1.7	H
C断面	1.7	H
B断面	1.5	H

角度 [deg.]	光度 [cd/1000lm]
0	336
10	332
20	319
30	295
40	259
50	213
60	158
70	97
80	37
90	0
100	0
110	0
120	0
130	0
140	0
150	0
160	0
170	0
180	0

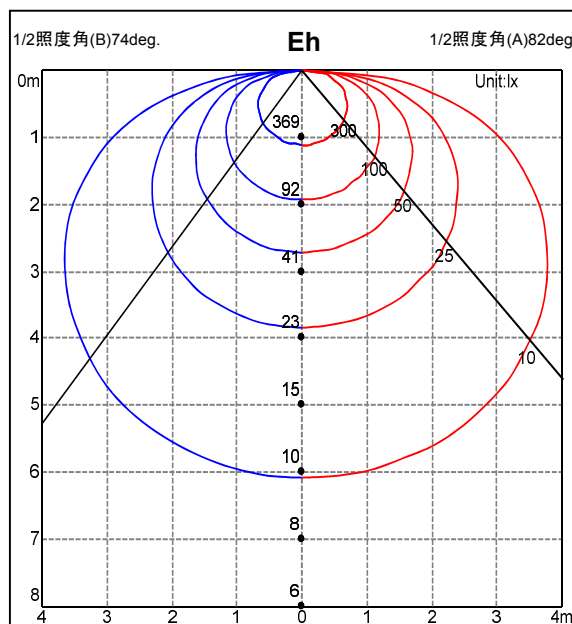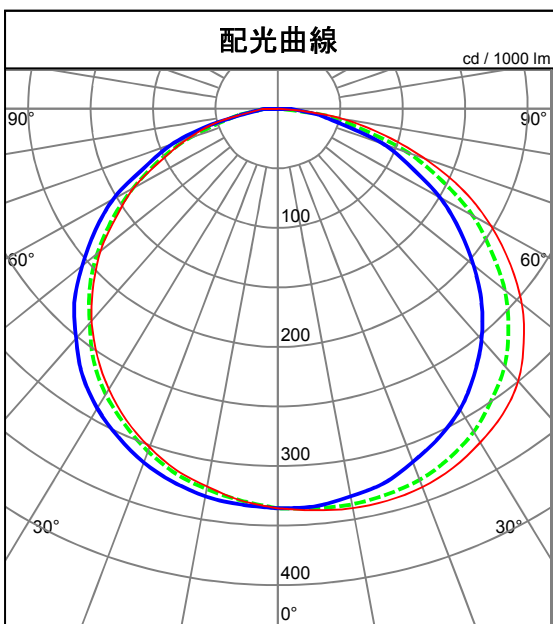

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 1100.0 / (間口 * 奥行)												
床(%)		10												
天井(%)		80			60			40			20			0
壁(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室 指 数	0.50	0.40	0.32	0.27	0.39	0.32	0.27	0.38	0.32	0.27	0.37	0.31	0.27	0.25
	0.70	0.55	0.48	0.43	0.54	0.47	0.43	0.53	0.47	0.42	0.52	0.46	0.42	0.40
	1.00	0.72	0.66	0.62	0.71	0.65	0.61	0.70	0.65	0.61	0.68	0.64	0.61	0.59
	1.25	0.82	0.77	0.73	0.80	0.76	0.72	0.79	0.75	0.72	0.78	0.74	0.71	0.70
	1.50	0.88	0.84	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.84	0.81	0.79	0.77
	2.00	0.96	0.93	0.90	0.94	0.92	0.90	0.93	0.91	0.89	0.92	0.90	0.88	0.87
	2.50	1.00	0.98	0.96	0.98	0.97	0.95	0.97	0.95	0.94	0.95	0.94	0.93	0.91
	3.00	1.02	1.01	0.99	1.01	0.99	0.98	0.99	0.98	0.97	0.98	0.97	0.96	0.94
	4.00	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.01	1.00	1.00	0.99	0.99	0.97
	5.00	1.06	1.05	1.04	1.04	1.03	1.03	1.02	1.02	1.01	1.01	1.00	1.00	0.98
7.00	1.07	1.07	1.06	1.06	1.05	1.05	1.04	1.03	1.03	1.03	1.02	1.01	1.01	0.99
10.00	1.08	1.07	1.07	1.07	1.06	1.05	1.05	1.04	1.04	1.03	1.02	1.02	1.02	1.00