

形式	FLWP1498L30
----	-------------





光源	
定格光束	820 lm

器具効率	100.0 %
下方効率	82.7 %
上方効率	17.3 %

最大取付間隔		
A断面	1.7 H	
C断面	1.6 H	
B断面	1.5 H	

角度 [deg.]	光度 [cd/1000lm]
0	217
10	214
20	206
30	192
40	175
50	153
60	129
70	104
80	79
90	60
100	48
110	37
120	27
130	18
140	12
150	4
160	1
170	0
180	0

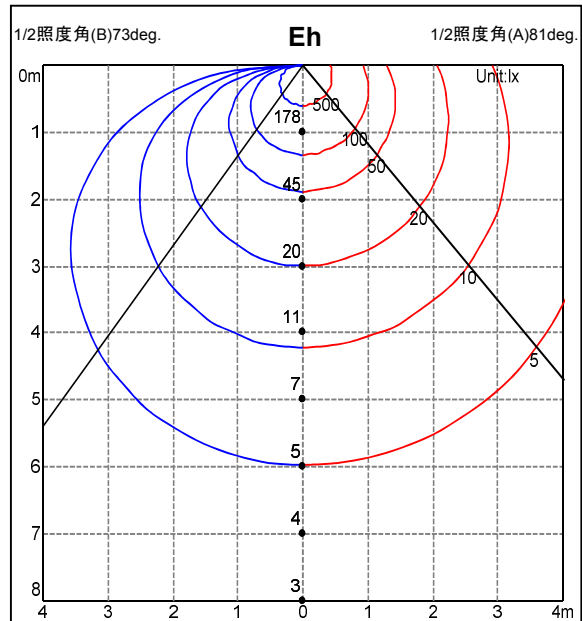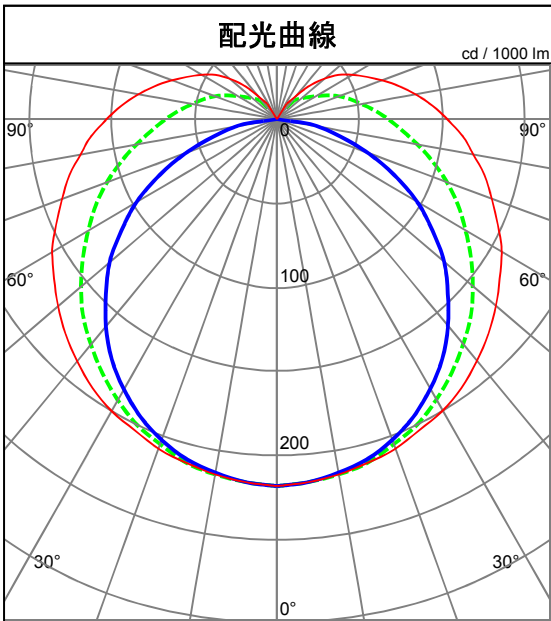

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 820.0 / (間口 * 奥行)																
床(%)		10																
天井(%)		80				60				40				20				0
壁(%)		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
室 指 数	0.50	0.34	0.27	0.22	0.32	0.25	0.21	0.30	0.24	0.20	0.28	0.23	0.19	0.16				
	0.70	0.47	0.39	0.33	0.44	0.37	0.32	0.41	0.35	0.31	0.38	0.33	0.29	0.26				
	1.00	0.61	0.53	0.48	0.57	0.51	0.46	0.54	0.48	0.44	0.51	0.46	0.42	0.39				
	1.25	0.69	0.62	0.57	0.65	0.59	0.55	0.61	0.56	0.52	0.58	0.54	0.50	0.47				
	1.50	0.75	0.69	0.64	0.71	0.66	0.61	0.67	0.63	0.59	0.63	0.60	0.56	0.53				
	2.00	0.83	0.78	0.74	0.78	0.74	0.71	0.74	0.71	0.68	0.70	0.67	0.65	0.61				
	2.50	0.88	0.83	0.80	0.83	0.79	0.76	0.78	0.76	0.73	0.74	0.72	0.70	0.66				
	3.00	0.91	0.87	0.84	0.86	0.83	0.80	0.81	0.79	0.77	0.77	0.75	0.73	0.69				
	4.00	0.95	0.92	0.89	0.90	0.87	0.85	0.85	0.83	0.81	0.80	0.78	0.77	0.73				
	5.00	0.97	0.95	0.92	0.92	0.90	0.88	0.87	0.85	0.84	0.82	0.81	0.79	0.75				
7.00	0.99	0.98	0.96	0.94	0.92	0.91	0.89	0.88	0.87	0.84	0.83	0.82	0.77					
10.00	1.01	1.00	0.99	0.95	0.94	0.94	0.90	0.89	0.89	0.85	0.84	0.84	0.79					