
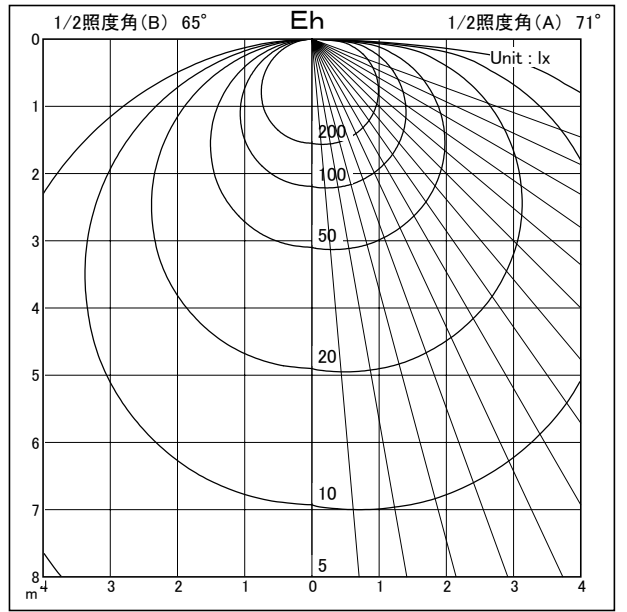
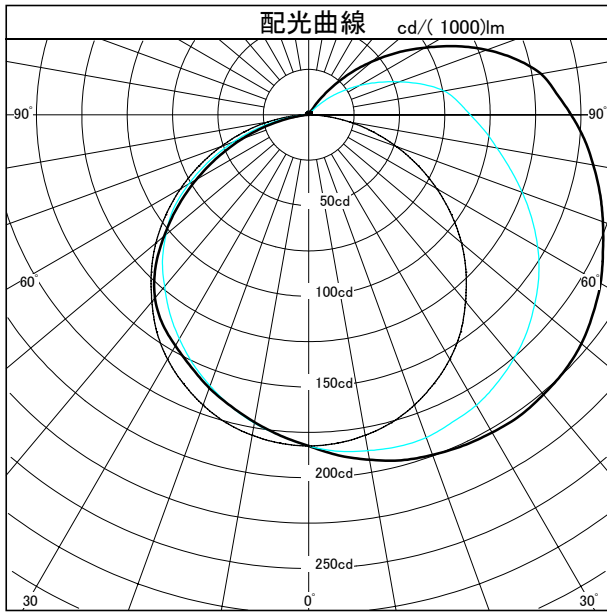


# 配光特性

図番 MS090003

 DN LIGHTING CO., LTD.

商品番号	SAL-KS1000FM		
カタログ番号	SAL-KS FM		
使用ランプ	FRT1000EN		
ランプ光束	2630.0	lm	1.000
器具効率	80.1 %		
下方効率	68.1 %		
上方効率	11.9 %		
最大取付間隔			
A断面			
C断面			
B断面			

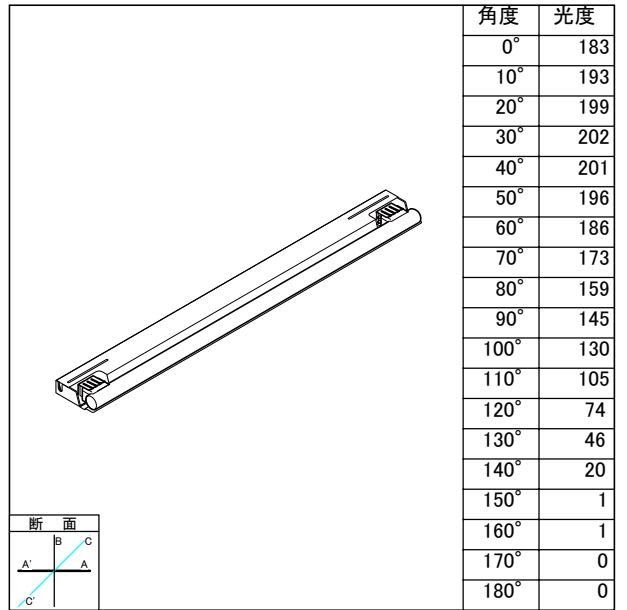

照明率表														平均照度=台数 * 照明率 * 保守率 * 2630 (光束)/(間口 * 奥行)													
床面反射率(%)		10												0													
天井面反射率(%)		80				60				40				20				0									
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0										
室	0.50	0.26	0.20	0.16	0.25	0.19	0.15	0.23	0.18	0.15	0.22	0.17	0.14	0.12													
	0.70	0.35	0.28	0.23	0.32	0.26	0.22	0.30	0.25	0.21	0.28	0.24	0.20	0.18													
	1.00	0.44	0.37	0.32	0.41	0.35	0.31	0.39	0.33	0.29	0.36	0.32	0.28	0.26													
	1.25	0.49	0.43	0.38	0.46	0.41	0.36	0.43	0.39	0.35	0.41	0.36	0.33	0.30													
	1.50	0.54	0.47	0.42	0.50	0.45	0.40	0.47	0.42	0.39	0.44	0.40	0.37	0.34													
指	2.00	0.59	0.54	0.49	0.56	0.51	0.47	0.52	0.48	0.45	0.49	0.46	0.43	0.40													
	2.50	0.63	0.58	0.54	0.60	0.55	0.51	0.56	0.52	0.49	0.52	0.49	0.47	0.43													
	3.00	0.66	0.61	0.57	0.62	0.58	0.55	0.58	0.55	0.52	0.55	0.52	0.50	0.46													
	4.00	0.70	0.66	0.63	0.66	0.63	0.60	0.62	0.59	0.57	0.58	0.56	0.54	0.50													
	5.00	0.72	0.69	0.66	0.68	0.65	0.63	0.64	0.62	0.60	0.60	0.58	0.57	0.53													
数	7.00	0.75	0.73	0.70	0.71	0.69	0.67	0.67	0.65	0.63	0.63	0.62	0.60	0.57													
	10.00	0.78	0.76	0.74	0.73	0.72	0.70	0.69	0.68	0.67	0.65	0.64	0.63	0.59													

製造：NIPPO ELECTRIC CO.,LTD.