

形式	MC-LED4-987NS
----	---------------





光源	
定格光束	1630 lm

器具効率	100.0 %
下方効率	87.7 %
上方効率	12.3 %

最大取付間隔		
A断面	1.7	H
C断面	1.6	H
B断面	1.5	H

角度 [deg.]	光度 [cd/1000lm]
0	255
10	253
20	243
30	227
40	203
50	174
60	139
70	100
80	60
90	34
100	33
110	32
120	25
130	13
140	2
150	0
160	0
170	0
180	0

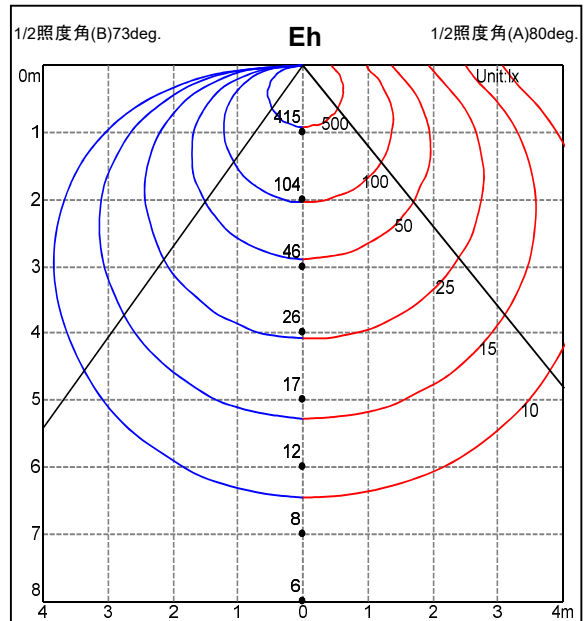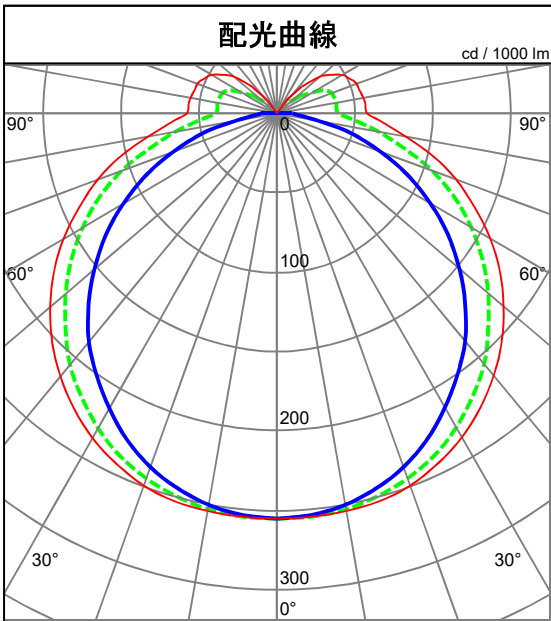

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 1630.0 / (間口 * 奥行)															
床(%)		10															
天井(%)		80				60				40				20			
壁(%)		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	
室 指 数	0.50	0.36	0.29	0.24	0.34	0.28	0.23	0.32	0.27	0.22	0.31	0.25	0.22	0.19			
	0.70	0.50	0.42	0.37	0.47	0.40	0.36	0.45	0.39	0.35	0.43	0.38	0.34	0.31			
	1.00	0.65	0.58	0.53	0.62	0.56	0.51	0.59	0.54	0.50	0.57	0.52	0.48	0.46			
	1.25	0.74	0.67	0.63	0.70	0.65	0.61	0.67	0.63	0.59	0.64	0.61	0.57	0.55			
	1.50	0.80	0.74	0.70	0.76	0.72	0.68	0.73	0.69	0.66	0.70	0.67	0.64	0.61			
	2.00	0.88	0.83	0.80	0.84	0.80	0.77	0.81	0.78	0.75	0.77	0.75	0.73	0.70			
	2.50	0.92	0.89	0.86	0.88	0.85	0.83	0.85	0.82	0.80	0.81	0.79	0.78	0.74			
	3.00	0.95	0.92	0.89	0.91	0.89	0.86	0.87	0.85	0.84	0.84	0.82	0.81	0.77			
	4.00	0.98	0.96	0.94	0.94	0.92	0.91	0.90	0.89	0.87	0.86	0.85	0.84	0.81			
	5.00	1.00	0.98	0.97	0.96	0.94	0.93	0.92	0.91	0.90	0.88	0.87	0.86	0.83			
7.00	1.02	1.01	1.00	0.98	0.97	0.96	0.93	0.93	0.92	0.89	0.89	0.88	0.84				
10.00	1.03	1.02	1.02	0.99	0.98	0.97	0.94	0.94	0.93	0.90	0.90	0.90	0.86				