

形式	MC-LED4-987NHR
----	----------------





光源	
定格光束	1500 lm

器具効率	100.0 %
下方効率	99.0 %
上方効率	1.0 %

最大取付間隔		
A断面	0.8	H
C断面	1.4	H
B断面	1.4	H

角度 [deg.]	光度 [cd/1000lm]
0	791
10	743
20	601
30	428
40	272
50	146
60	75
70	30
80	11
90	7
100	4
110	2
120	1
130	0
140	0
150	0
160	0
170	0
180	0

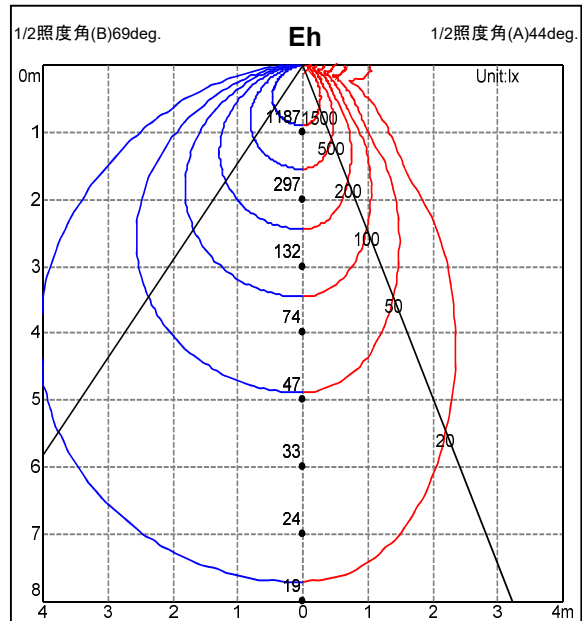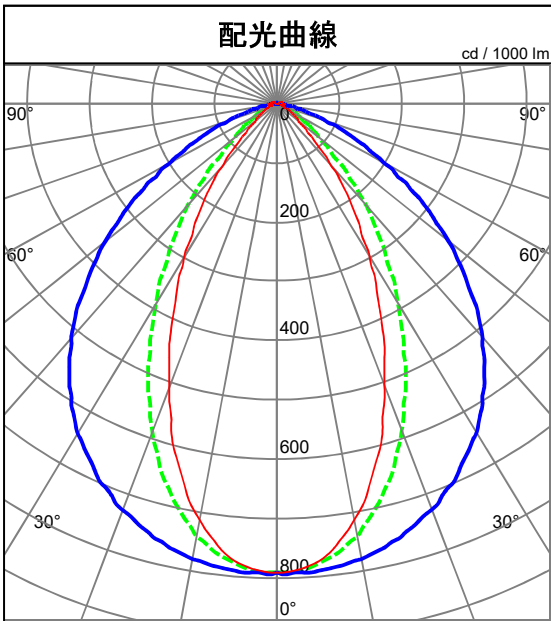

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 1500.0 / (間口 * 奥行)																
床 (%)		10																
天井 (%)		80				60				40				20				0
壁 (%)		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
室 指 数	0.50	0.59	0.53	0.49	0.58	0.53	0.49	0.57	0.52	0.49	0.57	0.52	0.49	0.47				
	0.70	0.78	0.73	0.70	0.77	0.72	0.69	0.76	0.72	0.69	0.75	0.71	0.69	0.67				
	1.00	0.94	0.90	0.87	0.93	0.89	0.87	0.92	0.89	0.87	0.90	0.88	0.86	0.85				
	1.25	1.00	0.97	0.95	0.99	0.97	0.95	0.98	0.96	0.94	0.97	0.95	0.93	0.92				
	1.50	1.04	1.01	1.00	1.02	1.00	0.99	1.01	0.99	0.98	1.00	0.98	0.97	0.96				
	2.00	1.07	1.06	1.04	1.06	1.04	1.03	1.04	1.03	1.02	1.03	1.02	1.01	1.00				
	2.50	1.09	1.08	1.06	1.07	1.06	1.05	1.06	1.05	1.04	1.04	1.03	1.03	1.01				
	3.00	1.10	1.09	1.08	1.08	1.07	1.07	1.07	1.06	1.05	1.05	1.04	1.04	1.02				
	4.00	1.12	1.11	1.10	1.10	1.09	1.08	1.08	1.07	1.07	1.06	1.05	1.05	1.03				
	5.00	1.12	1.12	1.11	1.10	1.10	1.09	1.08	1.08	1.07	1.06	1.06	1.06	1.04				
7.00	1.13	1.13	1.12	1.11	1.11	1.10	1.09	1.09	1.09	1.08	1.07	1.07	1.06					
10.00	1.14	1.13	1.13	1.11	1.11	1.11	1.09	1.09	1.09	1.09	1.07	1.07	1.07					