




形式	MC-LED4-987N
----	--------------



光源	
定格光束	1950 lm

器具効率	100.0 %
下方効率	100.0 %
上方効率	0.0 %

最大取付間隔			
A断面	1.5	H	
C断面	1.6	H	
B断面	1.6	H	

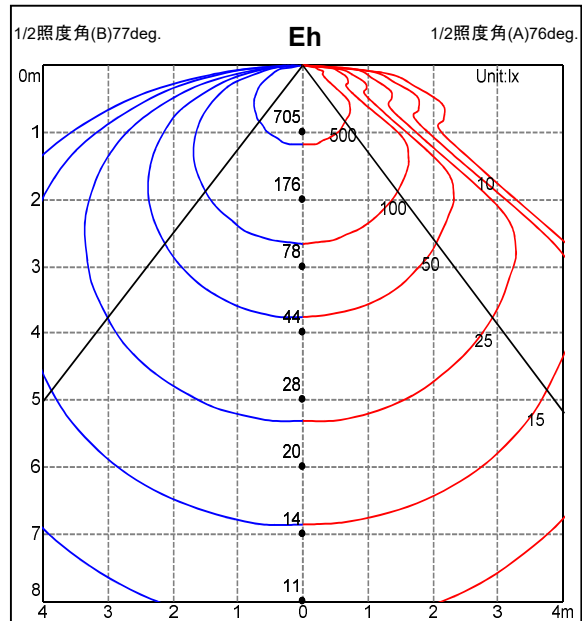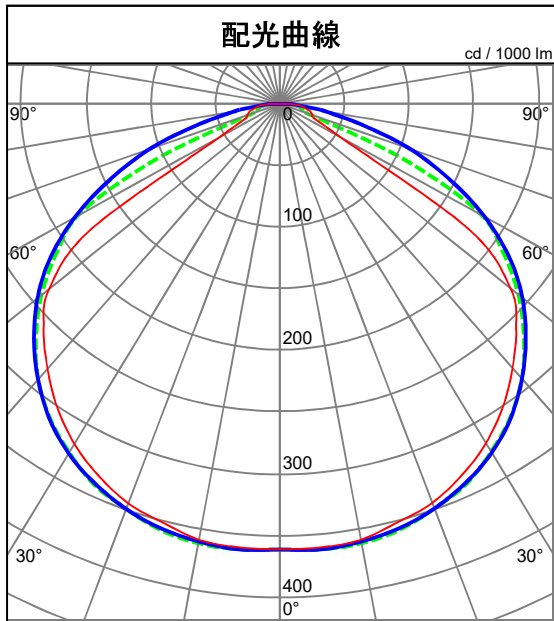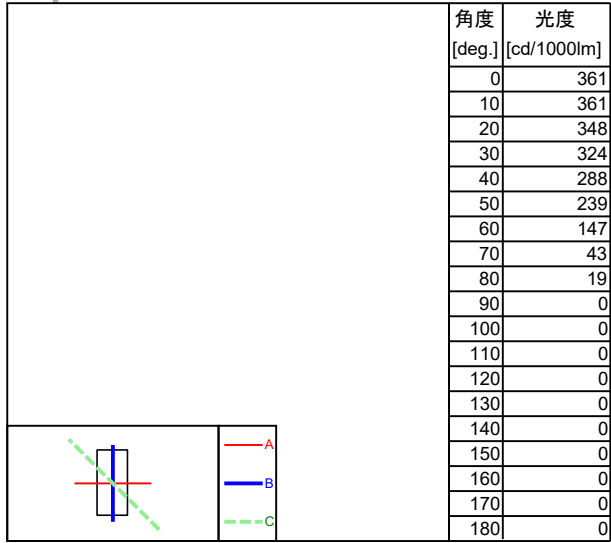

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 1950.0 / (間口 * 奥行)															
床 (%)		10															
天井 (%)		80				60				40				20			
壁 (%)		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	
室 指 数	0.50	0.41	0.34	0.29	0.40	0.33	0.29	0.39	0.33	0.29	0.38	0.33	0.29	0.27			
	0.70	0.58	0.51	0.46	0.57	0.51	0.46	0.56	0.50	0.46	0.55	0.50	0.46	0.44			
	1.00	0.77	0.72	0.68	0.76	0.71	0.68	0.75	0.71	0.67	0.74	0.70	0.67	0.65			
	1.25	0.87	0.83	0.80	0.86	0.82	0.80	0.85	0.82	0.79	0.84	0.81	0.79	0.77			
	1.50	0.94	0.91	0.88	0.92	0.90	0.87	0.91	0.89	0.87	0.90	0.88	0.86	0.85			
	2.00	1.00	0.98	0.97	0.99	0.97	0.96	0.98	0.96	0.95	0.96	0.95	0.94	0.93			
	2.50	1.03	1.02	1.00	1.02	1.00	0.99	1.00	0.99	0.98	0.99	0.98	0.97	0.96			
	3.00	1.04	1.03	1.02	1.03	1.02	1.01	1.01	1.00	1.00	1.00	0.99	0.99	0.97			
	4.00	1.05	1.04	1.04	1.04	1.03	1.02	1.02	1.01	1.01	1.01	1.01	1.00	1.00	0.98		
	5.00	1.06	1.05	1.04	1.04	1.03	1.03	1.02	1.02	1.01	1.01	1.01	1.00	1.00	0.98		
7.00	1.06	1.06	1.05	1.04	1.04	1.03	1.03	1.02	1.02	1.01	1.01	1.00	1.00	0.98			
10.00	1.07	1.06	1.06	1.05	1.04	1.04	1.03	1.02	1.02	1.01	1.01	1.01	1.00	0.98			