

形式	FXH-LED1040N-WP
----	-----------------





光源	
定格光束	2820 lm

器具効率	100.0 %
下方効率	100.0 %
上方効率	0.0 %

最大取付間隔		
A断面	1.5	H
C断面	1.5	H
B断面	1.5	H

角度 [deg.]	光度 [cd/1000lm]
0	353
10	348
20	333
30	305
40	266
50	216
60	155
70	87
80	31
90	0
100	0
110	0
120	0
130	0
140	0
150	0
160	0
170	0
180	0

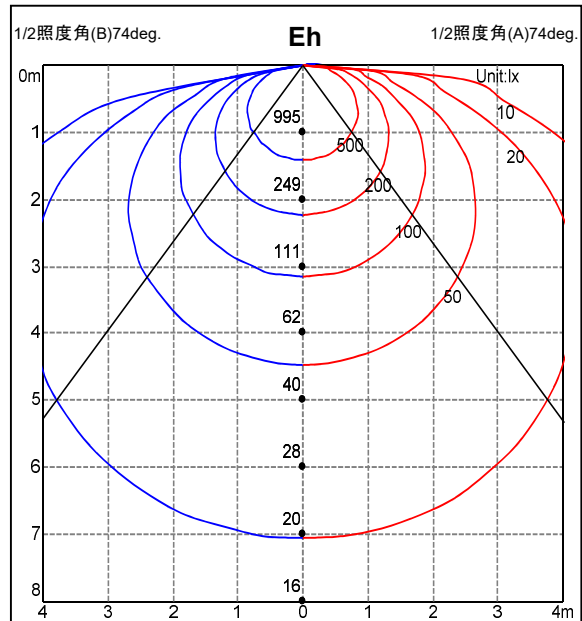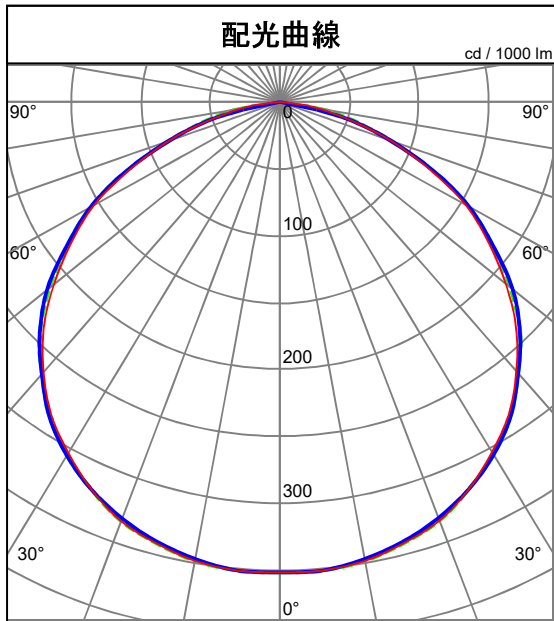

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 2820.0 / (間口 * 奥行)															
床(%)		10															
天井(%)		80				60				40				20			
壁(%)		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	
室 指 数	0.50	0.40	0.33	0.28	0.40	0.33	0.28	0.39	0.33	0.28	0.38	0.32	0.28	0.26			
	0.70	0.56	0.49	0.44	0.55	0.49	0.44	0.54	0.48	0.44	0.53	0.48	0.44	0.42			
	1.00	0.74	0.68	0.64	0.73	0.67	0.63	0.71	0.67	0.63	0.70	0.66	0.63	0.61			
	1.25	0.84	0.79	0.75	0.82	0.78	0.74	0.81	0.77	0.74	0.79	0.76	0.73	0.72			
	1.50	0.90	0.86	0.83	0.88	0.85	0.82	0.87	0.84	0.81	0.86	0.83	0.81	0.79			
	2.00	0.97	0.94	0.92	0.96	0.93	0.91	0.94	0.92	0.91	0.93	0.91	0.90	0.88			
	2.50	1.01	0.99	0.97	0.99	0.98	0.96	0.98	0.96	0.95	0.97	0.95	0.94	0.93			
	3.00	1.03	1.02	1.00	1.01	1.00	0.99	1.00	0.99	0.98	0.98	0.98	0.98	0.97	0.95		
	4.00	1.05	1.04	1.03	1.04	1.03	1.02	1.02	1.01	1.00	1.00	1.00	1.00	0.99	0.98		
	5.00	1.06	1.05	1.05	1.04	1.04	1.03	1.03	1.02	1.02	1.02	1.01	1.01	1.00	0.99		
7.00	1.07	1.07	1.06	1.06	1.05	1.05	1.04	1.03	1.03	1.03	1.02	1.01	1.01	1.00			
10.00	1.08	1.07	1.07	1.07	1.06	1.05	1.05	1.04	1.04	1.03	1.02	1.02	1.02	1.02	1.00		