

形式	FXL-LED1000N-WP		
----	-----------------	--	--





光源			
定格光束	520	lm	

器具効率	100.0	%
下方効率	100.0	%
上方効率	0.0	%

最大取付間隔			
A断面	1.5	H	
C断面	1.5	H	
B断面	1.5	H	

角度 [deg.]	光度 [cd/1000lm]
0	373
10	367
20	348
30	317
40	273
50	218
60	150
70	78
80	20
90	0
100	0
110	0
120	0
130	0
140	0
150	0
160	0
170	0
180	0

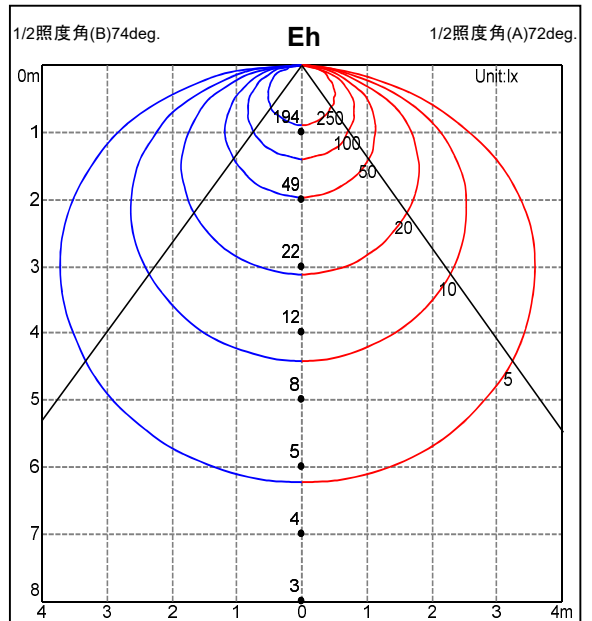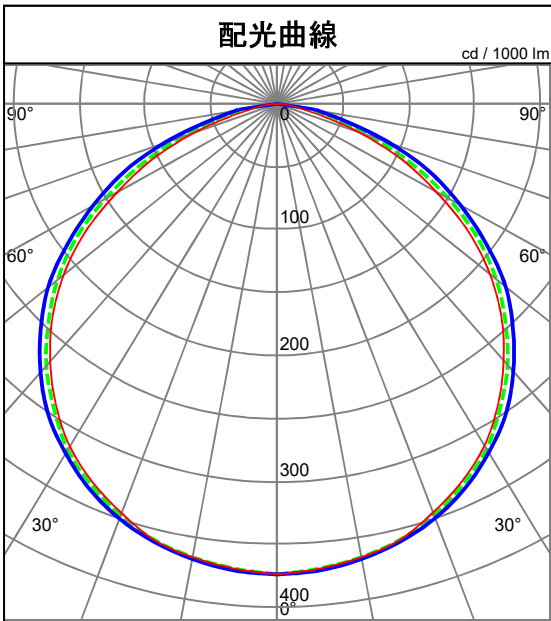

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 520.0 / (間口 * 奥行き)															
床(%)		10															
天井(%)		80				60				40				20			
壁(%)		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	
室 指 数	0.50	0.41	0.34	0.30	0.41	0.34	0.29	0.40	0.34	0.29	0.39	0.33	0.29	0.28			
	0.70	0.58	0.51	0.46	0.57	0.50	0.46	0.56	0.50	0.46	0.54	0.49	0.45	0.44			
	1.00	0.76	0.70	0.66	0.74	0.69	0.65	0.73	0.69	0.65	0.72	0.68	0.65	0.63			
	1.25	0.85	0.81	0.77	0.84	0.80	0.77	0.82	0.79	0.76	0.81	0.78	0.76	0.74			
	1.50	0.91	0.88	0.85	0.90	0.87	0.84	0.89	0.86	0.84	0.87	0.85	0.83	0.82			
	2.00	0.98	0.96	0.94	0.97	0.95	0.93	0.96	0.94	0.92	0.94	0.93	0.91	0.90			
	2.50	1.02	1.00	0.99	1.00	0.99	0.98	0.99	0.98	0.97	0.98	0.97	0.96	0.94			
	3.00	1.04	1.02	1.01	1.02	1.01	1.00	1.01	1.00	0.99	0.99	0.98	0.98	0.96			
	4.00	1.06	1.05	1.04	1.04	1.03	1.02	1.02	1.02	1.01	1.01	1.00	1.00	0.98			
	5.00	1.07	1.06	1.05	1.05	1.04	1.04	1.03	1.03	1.02	1.01	1.01	1.01	0.99			
7.00	1.07	1.07	1.06	1.05	1.05	1.05	1.04	1.03	1.03	1.02	1.02	1.01	1.00				
10.00	1.08	1.07	1.07	1.06	1.06	1.05	1.04	1.04	1.03	1.02	1.02	1.02	1.00				