




形式	TRL1000ND-APD
----	---------------



光源	
定格光束	1700 lm

器具効率	100.0 %
下方効率	79.4 %
上方効率	20.6 %

最大取付間隔		
A断面	1.8	H
C断面	1.6	H
B断面	1.5	H

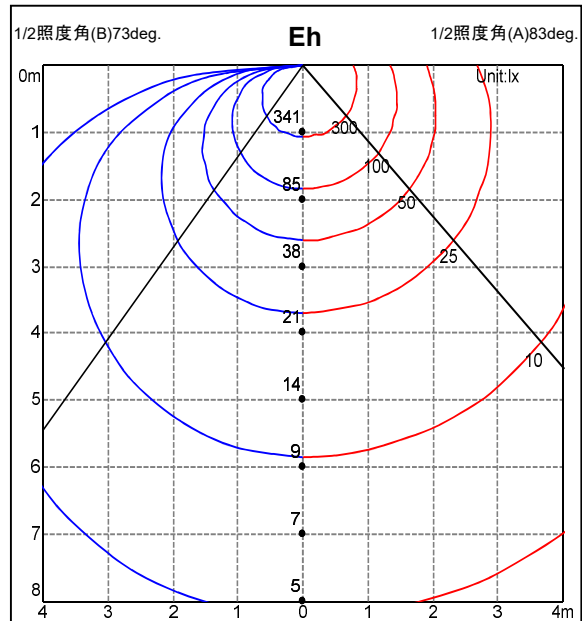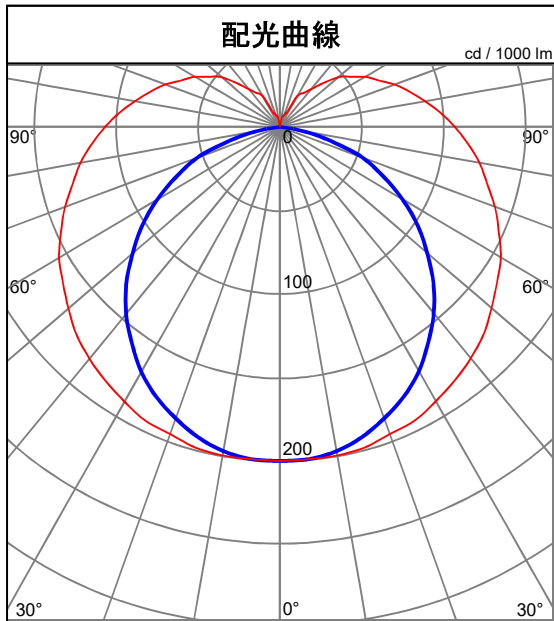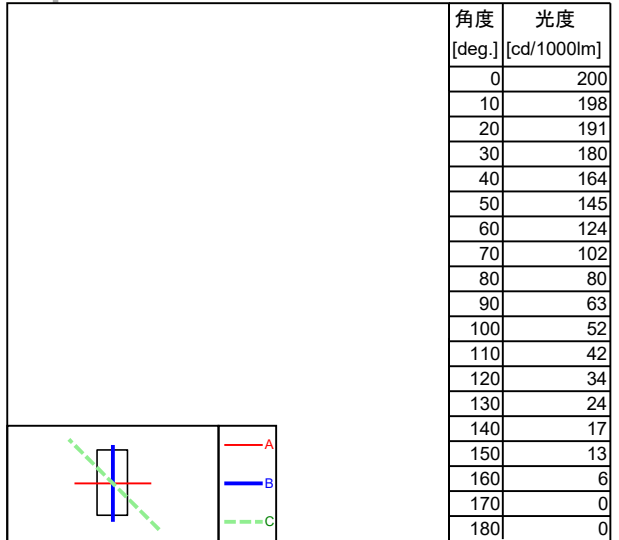

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 1700.0 / (間口 * 奥行)																
床(%)		10																
天井(%)		80				60				40				20				0
壁(%)		55	30	10	55	30	10	55	30	10	55	30	10	55	30	10	0	
室 指 数	0.50	0.36	0.26	0.21	0.33	0.25	0.20	0.31	0.23	0.19	0.28	0.21	0.18	0.15				
	0.70	0.48	0.38	0.32	0.45	0.36	0.31	0.41	0.33	0.29	0.38	0.31	0.28	0.25				
	1.00	0.62	0.52	0.46	0.57	0.49	0.44	0.53	0.46	0.42	0.50	0.44	0.40	0.36				
	1.25	0.70	0.61	0.55	0.65	0.57	0.53	0.61	0.54	0.50	0.56	0.51	0.48	0.44				
	1.50	0.75	0.67	0.62	0.70	0.64	0.59	0.66	0.60	0.56	0.61	0.57	0.54	0.50				
	2.00	0.83	0.76	0.72	0.78	0.72	0.68	0.73	0.68	0.65	0.68	0.64	0.62	0.57				
	2.50	0.88	0.82	0.78	0.82	0.77	0.74	0.77	0.73	0.70	0.72	0.69	0.67	0.62				
	3.00	0.91	0.86	0.82	0.85	0.81	0.78	0.79	0.76	0.74	0.74	0.72	0.70	0.65				
	4.00	0.94	0.90	0.88	0.88	0.85	0.83	0.83	0.80	0.78	0.77	0.75	0.74	0.69				
	5.00	0.96	0.93	0.91	0.90	0.88	0.86	0.85	0.83	0.81	0.79	0.78	0.76	0.71				
7.00	0.99	0.96	0.95	0.93	0.91	0.89	0.87	0.85	0.84	0.81	0.80	0.79	0.74					
10.00	1.00	0.99	0.98	0.94	0.93	0.92	0.88	0.87	0.86	0.82	0.82	0.81	0.76					