

形式	HO2-LEDN912F-L30
----	------------------





光源	LED
定格光束	2000 lm

器具効率	100.0 %
下方効率	98.6 %
上方効率	1.4 %

最大取付間隔		
A断面	0.4	H
C断面	0.4	H
B断面	0.4	H

角度 [deg.]	光度 [cd/1000lm]
0	4530
10	2721
20	523
30	172
40	68
50	38
60	22
70	10
80	3
90	0
100	0
110	0
120	1
130	1
140	3
150	6
160	11
170	12
180	11

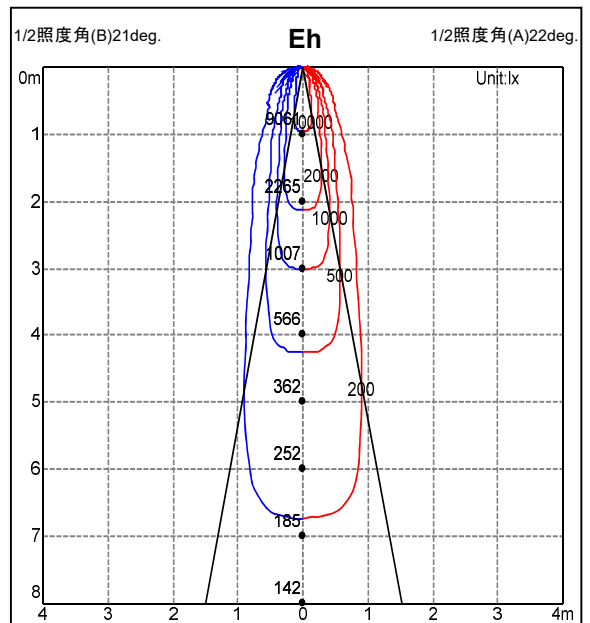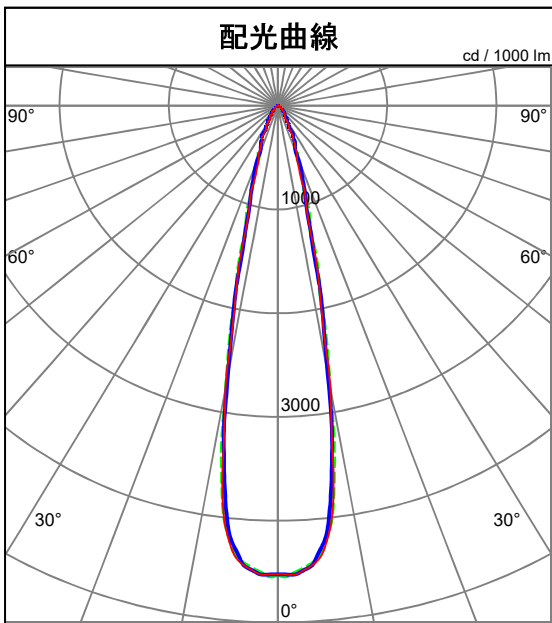

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 2000.0 / (間口 * 奥行)															
床 (%)		10															
天井 (%)		80				60				40				20			
壁 (%)		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	
室 指 数	0.50	0.72	0.69	0.66	0.72	0.68	0.66	0.71	0.68	0.66	0.70	0.67	0.65	0.64			
	0.70	0.91	0.88	0.86	0.90	0.88	0.86	0.89	0.87	0.86	0.89	0.87	0.85	0.85			
	1.00	1.01	0.99	0.98	1.00	0.98	0.97	0.99	0.98	0.97	0.98	0.97	0.96	0.96			
	1.25	1.02	1.01	1.00	1.01	1.00	0.99	1.00	0.99	0.98	0.99	0.98	0.98	0.97	0.96		
	1.50	1.02	1.01	1.00	1.01	1.00	0.99	1.00	0.99	0.98	0.99	0.98	0.97	0.96			
	2.00	1.03	1.01	1.00	1.01	1.00	0.99	1.00	0.99	0.98	0.98	0.98	0.97	0.96			
	2.50	1.04	1.02	1.01	1.02	1.01	1.00	1.00	1.00	0.99	0.99	0.99	0.98	0.98	0.96		
	3.00	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.01	1.00	1.00	1.00	0.99	0.99	0.97		
	4.00	1.07	1.06	1.05	1.05	1.04	1.04	1.03	1.03	1.02	1.01	1.01	1.01	1.01	0.99		
	5.00	1.08	1.07	1.07	1.06	1.06	1.05	1.04	1.04	1.04	1.04	1.02	1.02	1.02	1.00		
7.00	1.09	1.09	1.09	1.07	1.07	1.07	1.05	1.05	1.05	1.05	1.03	1.03	1.03	1.02			
10.00	1.09	1.10	1.10	1.07	1.07	1.07	1.05	1.05	1.06	1.03	1.03	1.03	1.04	1.02			