

形式	FXA-T9-1003N-WP
----	-----------------





光源	
定格光束	360 lm

器具効率	100.0 %
下方効率	99.1 %
上方効率	0.9 %

最大取付間隔		
A断面	1.5	H
C断面	1.5	H
B断面	1.5	H

角度 [deg.]	光度 [cd/1000lm]
0	343
10	337
20	319
30	290
40	253
50	208
60	153
70	95
80	39
90	5
100	3
110	2
120	1
130	0
140	0
150	0
160	0
170	0
180	0

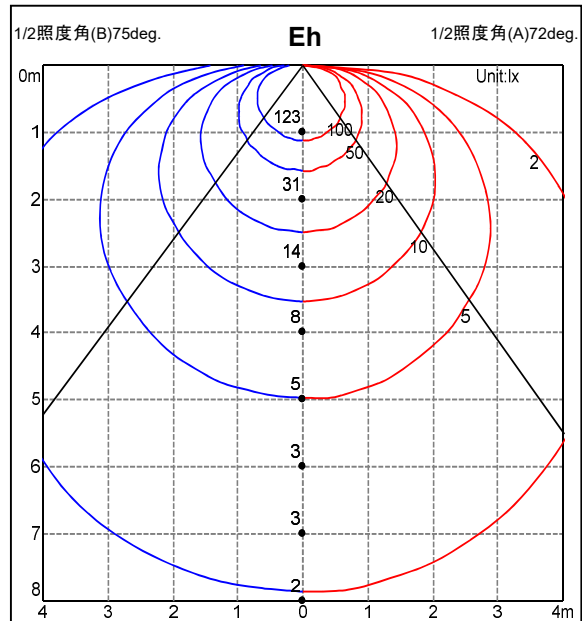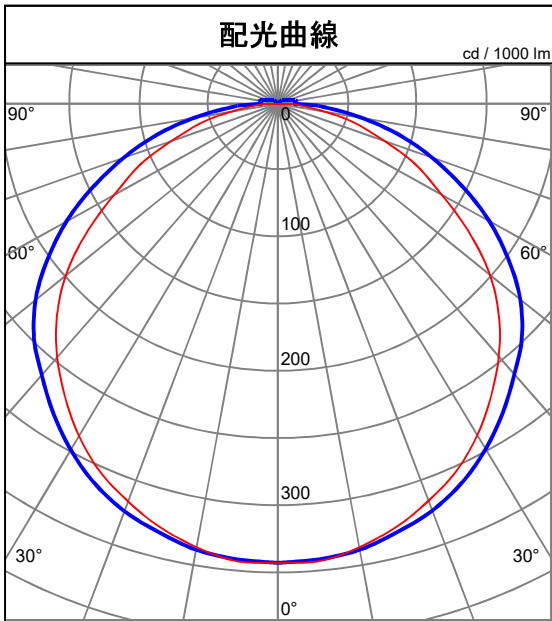

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 360.0 / (間口 * 奥行き)															
床 (%)		10															
天井 (%)		80				60				40				20			
壁 (%)		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	
室 指 数	0.50	0.40	0.32	0.28	0.39	0.32	0.27	0.38	0.32	0.27	0.37	0.31	0.27	0.25	0.25		
	0.70	0.55	0.48	0.43	0.54	0.47	0.42	0.53	0.47	0.42	0.51	0.46	0.42	0.40	0.40		
	1.00	0.72	0.66	0.61	0.71	0.65	0.61	0.69	0.64	0.60	0.68	0.63	0.60	0.58	0.58		
	1.25	0.81	0.76	0.72	0.80	0.75	0.72	0.78	0.74	0.71	0.77	0.73	0.70	0.69	0.69		
	1.50	0.88	0.83	0.80	0.86	0.82	0.79	0.85	0.81	0.78	0.83	0.80	0.78	0.76	0.76		
	2.00	0.95	0.92	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.90	0.89	0.87	0.85	0.85		
	2.50	0.99	0.97	0.95	0.98	0.96	0.94	0.96	0.94	0.93	0.94	0.93	0.92	0.90	0.90		
	3.00	1.02	1.00	0.98	1.00	0.98	0.97	0.98	0.97	0.96	0.96	0.95	0.94	0.93	0.93		
	4.00	1.04	1.03	1.02	1.02	1.01	1.00	1.00	1.00	0.99	0.99	0.98	0.97	0.96	0.96		
	5.00	1.05	1.04	1.04	1.03	1.03	1.02	1.02	1.01	1.01	1.00	1.00	0.99	0.99	0.97	0.97	
7.00	1.07	1.06	1.05	1.04	1.04	1.03	1.02	1.02	1.02	1.01	1.00	1.00	1.00	0.98	0.98		
10.00	1.07	1.07	1.06	1.05	1.05	1.04	1.03	1.03	1.03	1.02	1.01	1.01	1.01	1.01	0.99		