




形式	FXA-S11-1030N-WP
----	------------------



光源	
定格光束	760 lm

器具効率	100.0 %
下方効率	87.5 %
上方効率	12.5 %

最大取付間隔		
A断面	1.6	H
C断面	1.6	H
B断面	1.5	H

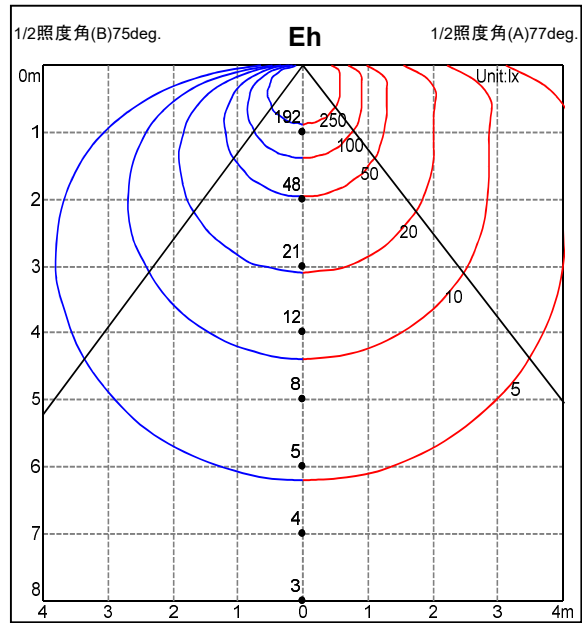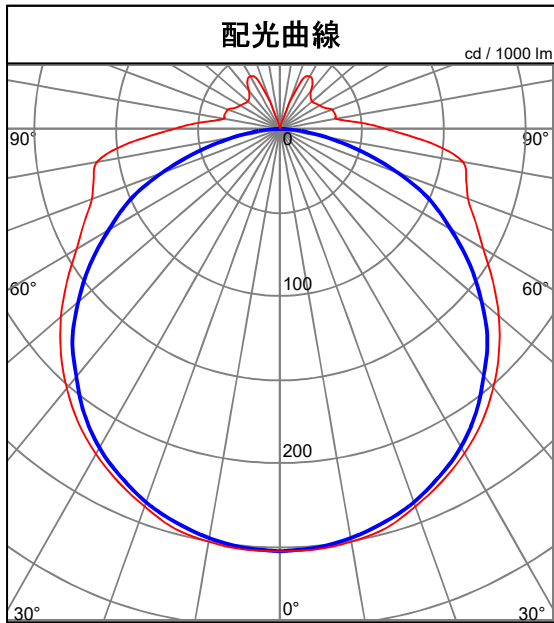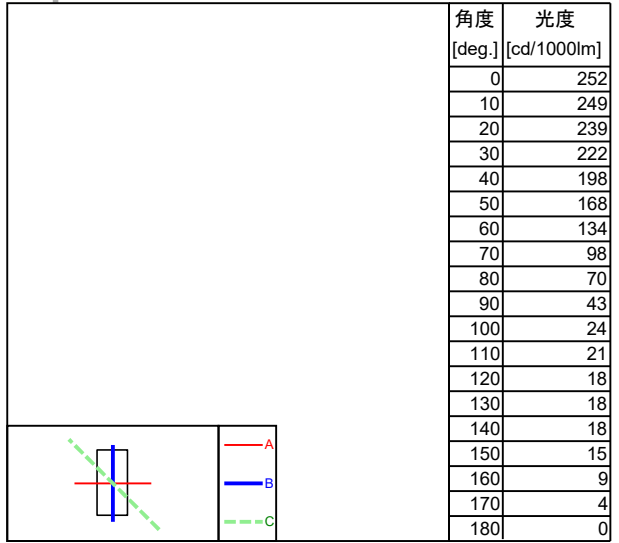

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 760.0 / (間口 * 奥行き)																
床(%)		10																
天井(%)		80				60				40				20				0
壁(%)		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
室 指 数	0.50	0.36	0.28	0.23	0.34	0.27	0.23	0.32	0.26	0.22	0.30	0.25	0.21	0.19				
	0.70	0.49	0.42	0.36	0.47	0.40	0.35	0.44	0.38	0.34	0.42	0.37	0.33	0.30				
	1.00	0.64	0.57	0.52	0.61	0.55	0.50	0.58	0.53	0.49	0.56	0.51	0.47	0.45				
	1.25	0.73	0.66	0.61	0.69	0.64	0.60	0.66	0.62	0.58	0.63	0.59	0.56	0.53				
	1.50	0.79	0.73	0.68	0.75	0.70	0.66	0.72	0.68	0.65	0.69	0.66	0.63	0.60				
	2.00	0.86	0.82	0.78	0.83	0.79	0.76	0.79	0.76	0.73	0.76	0.73	0.71	0.68				
	2.50	0.91	0.87	0.84	0.87	0.84	0.81	0.83	0.81	0.78	0.80	0.78	0.76	0.72				
	3.00	0.94	0.90	0.88	0.90	0.87	0.85	0.86	0.84	0.82	0.82	0.80	0.79	0.75				
	4.00	0.97	0.95	0.92	0.93	0.91	0.89	0.89	0.87	0.86	0.85	0.84	0.82	0.79				
	5.00	0.99	0.97	0.95	0.95	0.93	0.91	0.91	0.89	0.88	0.87	0.86	0.85	0.81				
7.00	1.01	1.00	0.98	0.97	0.95	0.94	0.92	0.91	0.90	0.88	0.87	0.87	0.83					
10.00	1.03	1.02	1.01	0.98	0.97	0.96	0.94	0.93	0.92	0.89	0.89	0.88	0.84					