

形式	FXYS-LED1005N		
----	---------------	--	--





光源			
定格光束	420	lm	

器具効率	100.0	%
下方効率	99.6	%
上方効率	0.4	%

最大取付間隔			
A断面	1.6	H	
C断面	1.6	H	
B断面	1.5	H	

角度 [deg.]	光度 [cd/1000lm]
0	312
10	309
20	297
30	274
40	242
50	203
60	157
70	107
80	55
90	14
100	0
110	0
120	0
130	0
140	0
150	0
160	0
170	0
180	0

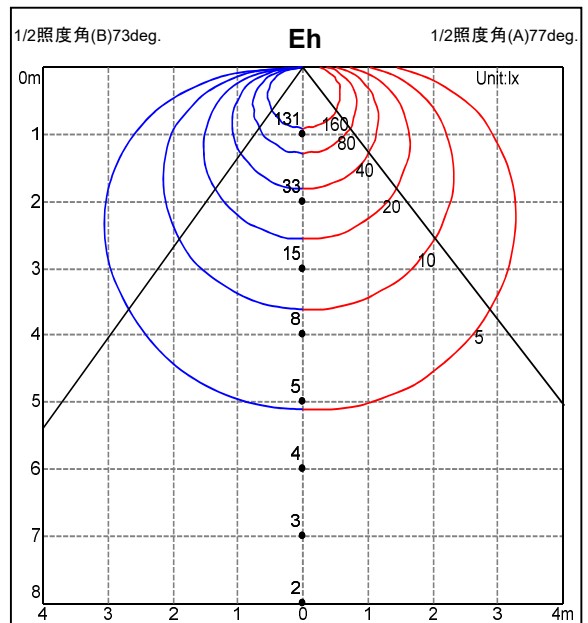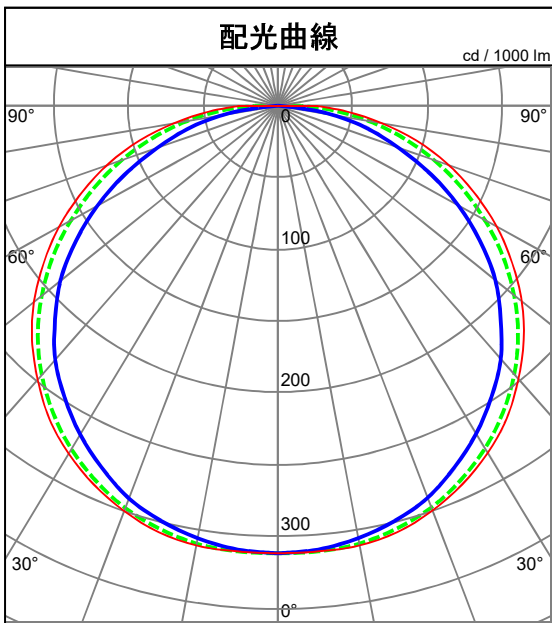

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 420.0 / (間口 * 奥行き)																
床(%)		10																
天井(%)		80				60				40				20				0
壁(%)		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
室 指 数	0.50	0.38	0.31	0.26	0.37	0.30	0.26	0.36	0.30	0.26	0.35	0.30	0.25	0.24				
	0.70	0.53	0.46	0.40	0.52	0.45	0.40	0.50	0.44	0.40	0.49	0.44	0.40	0.38				
	1.00	0.70	0.63	0.58	0.68	0.62	0.57	0.67	0.61	0.57	0.65	0.60	0.57	0.55				
	1.25	0.79	0.73	0.69	0.77	0.72	0.68	0.76	0.71	0.68	0.74	0.70	0.67	0.65				
	1.50	0.85	0.80	0.76	0.84	0.79	0.76	0.82	0.78	0.75	0.80	0.77	0.74	0.73				
	2.00	0.93	0.89	0.86	0.91	0.88	0.85	0.90	0.87	0.85	0.88	0.86	0.84	0.82				
	2.50	0.97	0.95	0.92	0.96	0.93	0.91	0.94	0.92	0.90	0.92	0.91	0.89	0.87				
	3.00	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.93	0.95	0.93	0.92	0.91				
	4.00	1.03	1.01	1.00	1.01	1.00	0.98	0.99	0.98	0.97	0.97	0.97	0.96	0.94				
	5.00	1.04	1.03	1.02	1.02	1.01	1.00	1.01	1.00	0.99	0.99	0.98	0.97	0.96				
7.00	1.06	1.05	1.04	1.04	1.04	1.03	1.02	1.02	1.01	1.01	1.00	1.00	0.99	0.97				
10.00	1.07	1.06	1.06	1.06	1.05	1.04	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.98				