




形式	MU-LED999N
----	------------



光源	LED
定格光束	490 lm

器具効率	100.0 %
下方効率	92.8 %
上方効率	7.2 %

最大取付間隔		
A断面	1.6	H
C断面	1.6	H
B断面	1.5	H

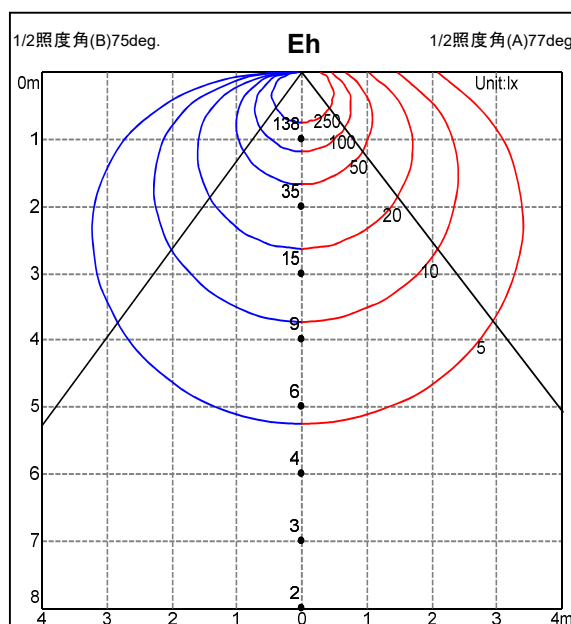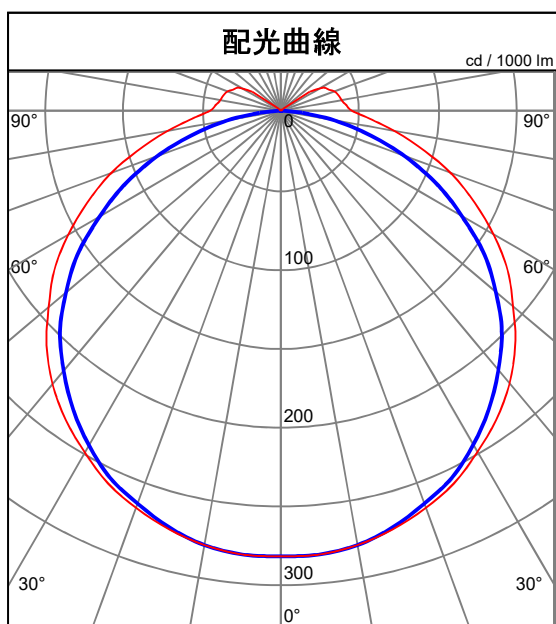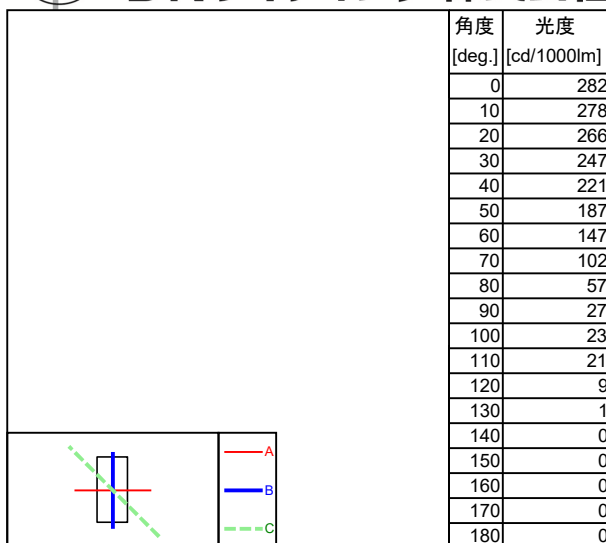

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 490.0 / (間口 * 奥行)															
床(%)		10															
天井(%)		80				60				40				20			
壁(%)		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	
室 指 数	0.50	0.37	0.30	0.25	0.36	0.29	0.24	0.34	0.28	0.24	0.33	0.27	0.23	0.21	0.21		
	0.70	0.51	0.44	0.38	0.49	0.42	0.38	0.47	0.41	0.37	0.46	0.40	0.36	0.34	0.34		
	1.00	0.67	0.60	0.55	0.65	0.59	0.54	0.62	0.57	0.53	0.60	0.56	0.52	0.50	0.50		
	1.25	0.76	0.70	0.65	0.73	0.68	0.64	0.71	0.67	0.63	0.69	0.65	0.62	0.59	0.59		
	1.50	0.82	0.77	0.73	0.80	0.75	0.71	0.77	0.73	0.70	0.75	0.71	0.69	0.66	0.66		
	2.00	0.90	0.86	0.83	0.87	0.84	0.81	0.85	0.82	0.79	0.82	0.80	0.78	0.75	0.75		
	2.50	0.94	0.91	0.88	0.92	0.89	0.86	0.89	0.87	0.85	0.86	0.84	0.83	0.80	0.80		
	3.00	0.97	0.95	0.92	0.94	0.92	0.90	0.91	0.89	0.88	0.89	0.87	0.86	0.83	0.83		
	4.00	1.00	0.98	0.97	0.97	0.96	0.94	0.94	0.93	0.92	0.91	0.90	0.89	0.87	0.87		
	5.00	1.02	1.00	0.99	0.99	0.97	0.96	0.96	0.95	0.94	0.93	0.92	0.91	0.88	0.88		
7.00	1.04	1.03	1.02	1.00	0.99	0.99	0.97	0.96	0.96	0.94	0.93	0.93	0.90	0.90			
10.00	1.05	1.04	1.03	1.01	1.01	1.00	0.98	0.97	0.97	0.95	0.94	0.94	0.91	0.91			