

形式	PFM1030(FXH-LED1014N)		
----	-----------------------	--	--





光源			
定格光束	1490	lm	

器具効率	100.0	%
下方効率	99.8	%
上方効率	0.2	%

最大取付間隔			
A断面	1.5	H	
C断面	1.5	H	
B断面	1.5	H	

角度 [deg.]	光度 [cd/1000lm]
0	337
10	332
20	316
30	289
40	253
50	209
60	157
70	100
80	41
90	3
100	1
110	0
120	0
130	0
140	0
150	0
160	0
170	0
180	0

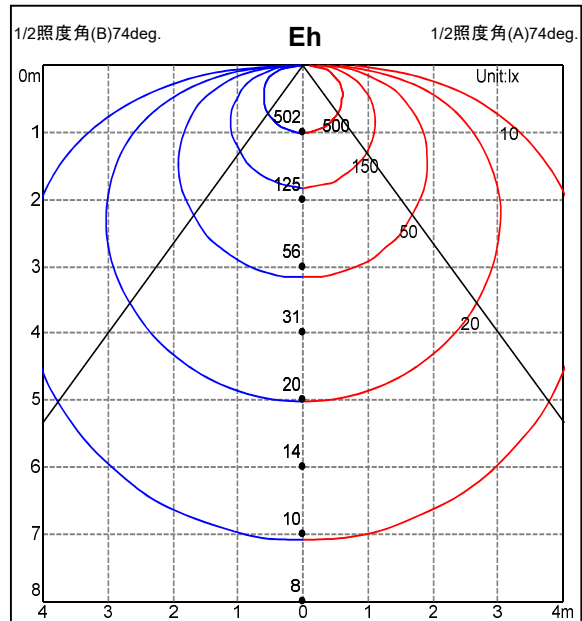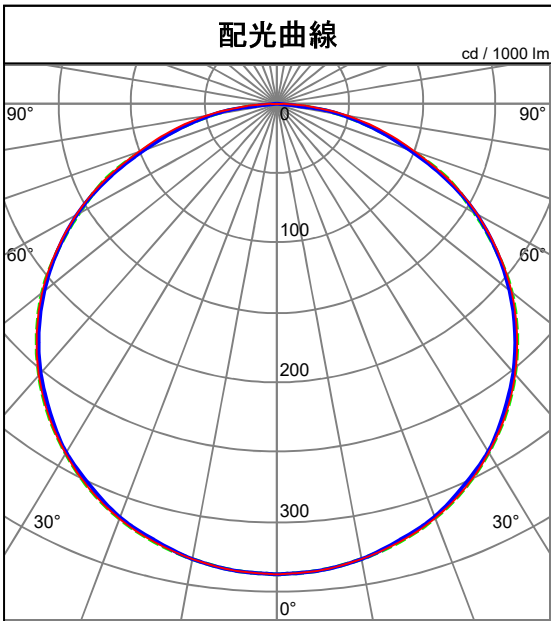

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 1490.0 / (間口 * 奥行き)																
床(%)		10																
天井(%)		80				60				40				20				0
壁(%)		55	30	10	55	30	10	55	30	10	55	30	10	55	30	10	0	
室 指 数	0.50	0.42	0.32	0.27	0.41	0.32	0.27	0.40	0.31	0.27	0.39	0.31	0.27	0.25				
	0.70	0.57	0.48	0.42	0.56	0.47	0.42	0.54	0.46	0.42	0.53	0.46	0.42	0.40				
	1.00	0.74	0.65	0.61	0.72	0.65	0.60	0.70	0.64	0.60	0.69	0.63	0.60	0.58				
	1.25	0.83	0.76	0.72	0.81	0.75	0.71	0.79	0.74	0.71	0.78	0.73	0.70	0.69				
	1.50	0.89	0.83	0.80	0.87	0.82	0.79	0.85	0.81	0.78	0.84	0.80	0.78	0.76				
	2.00	0.96	0.92	0.89	0.94	0.91	0.89	0.93	0.90	0.88	0.91	0.89	0.87	0.85				
	2.50	1.00	0.97	0.95	0.98	0.96	0.94	0.97	0.94	0.93	0.95	0.93	0.92	0.90				
	3.00	1.02	1.00	0.98	1.01	0.98	0.97	0.99	0.97	0.96	0.97	0.96	0.95	0.93				
	4.00	1.05	1.03	1.02	1.03	1.01	1.00	1.01	1.00	0.99	0.99	0.98	0.98	0.96				
	5.00	1.06	1.05	1.04	1.04	1.03	1.02	1.02	1.01	1.01	1.00	1.00	0.99	0.98				
7.00	1.07	1.06	1.06	1.05	1.04	1.04	1.03	1.03	1.02	1.01	1.01	1.01	0.99					
10.00	1.08	1.07	1.07	1.06	1.05	1.05	1.04	1.03	1.03	1.02	1.01	1.01	0.99					