

形式	TRM1000NS-FMZ
----	---------------





光源	
定格光束	3160 lm

器具効率	100.0 %
下方効率	80.2 %
上方効率	19.8 %

最大取付間隔		
A断面	1.8	H
C断面	1.7	H
B断面	1.5	H

角度 [deg.]	光度 [cd/1000lm]
0	207
10	207
20	204
30	194
40	178
50	156
60	130
70	98
80	65
90	45
100	42
110	40
120	36
130	30
140	22
150	16
160	8
170	4
180	2

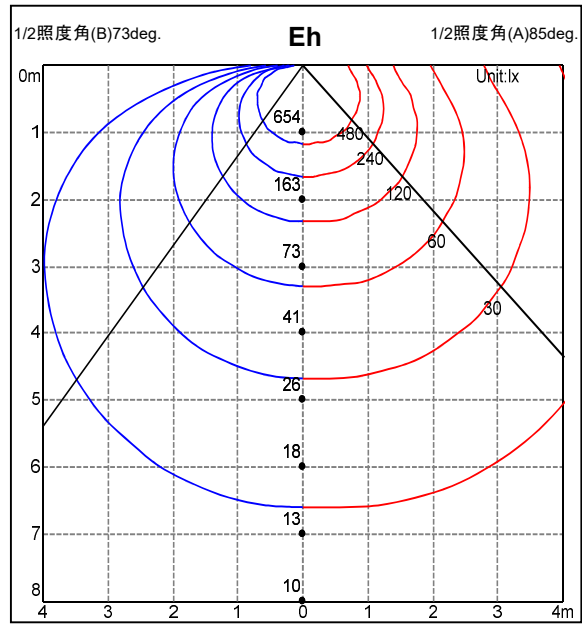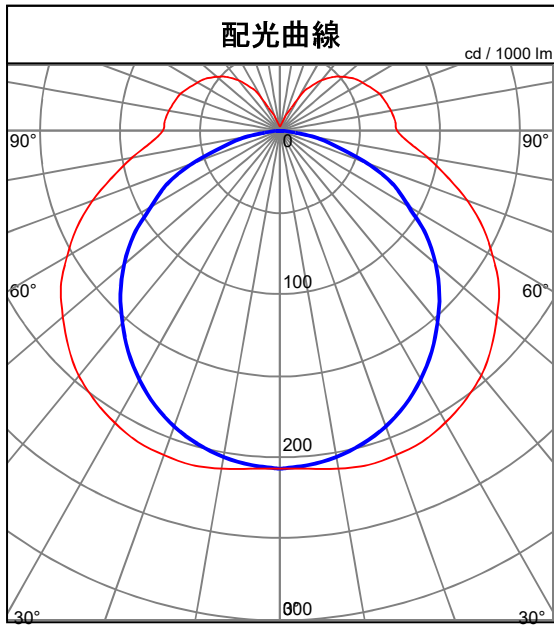

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 3160.0 / (間口 * 奥行)																
床(%)		10																
天井(%)		80				60				40				20				0
壁(%)		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
室 指 数	0.50	0.34	0.27	0.22	0.32	0.25	0.21	0.30	0.24	0.20	0.27	0.22	0.19	0.16				
	0.70	0.47	0.39	0.34	0.44	0.37	0.32	0.41	0.35	0.31	0.38	0.33	0.29	0.26				
	1.00	0.61	0.54	0.49	0.58	0.51	0.47	0.54	0.49	0.45	0.51	0.46	0.43	0.39				
	1.25	0.70	0.63	0.58	0.66	0.60	0.56	0.62	0.57	0.53	0.58	0.54	0.51	0.47				
	1.50	0.76	0.70	0.65	0.71	0.67	0.62	0.67	0.63	0.60	0.63	0.60	0.57	0.53				
	2.00	0.84	0.79	0.75	0.79	0.75	0.72	0.74	0.71	0.68	0.70	0.67	0.65	0.61				
	2.50	0.89	0.85	0.81	0.83	0.80	0.77	0.79	0.76	0.74	0.74	0.72	0.70	0.66				
	3.00	0.92	0.88	0.85	0.86	0.84	0.81	0.81	0.79	0.77	0.76	0.75	0.73	0.69				
	4.00	0.95	0.93	0.90	0.90	0.88	0.86	0.84	0.83	0.81	0.79	0.78	0.77	0.72				
5.00	0.97	0.95	0.93	0.92	0.90	0.88	0.86	0.85	0.84	0.81	0.80	0.79	0.74					
7.00	0.99	0.98	0.96	0.94	0.92	0.91	0.88	0.87	0.86	0.83	0.82	0.81	0.76					
10.00	1.01	1.00	0.99	0.95	0.94	0.93	0.89	0.89	0.88	0.84	0.83	0.83	0.78					