

形式	仮称FXRGB-LED970-チラシ用
----	---------------------





光源	
定格光束	360 lm

器具効率	100.0 %
下方効率	100.0 %
上方効率	0.0 %

最大取付間隔		
A断面	1.5	H
C断面	1.5	H
B断面	1.5	H

角度 [deg.]	光度 [cd/1000lm]
0	374
10	370
20	353
30	320
40	277
50	224
60	157
70	76
80	0
90	0
100	0
110	0
120	0
130	0
140	0
150	0
160	0
170	0
180	0

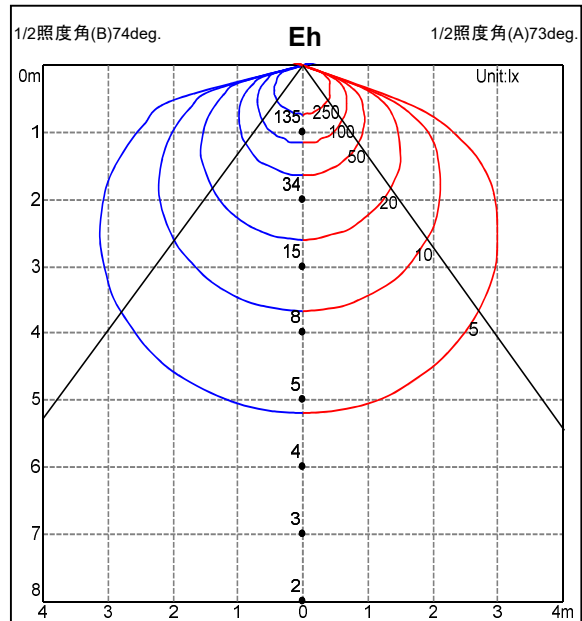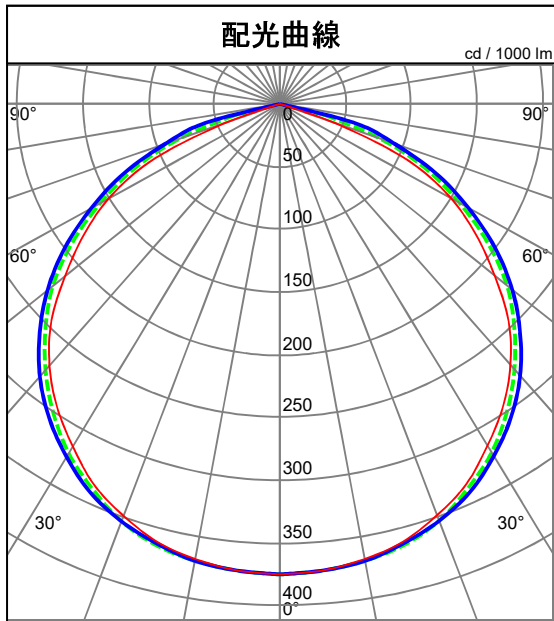

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 360.0 / (間口 * 奥行)															
床(%)		10															
天井(%)		80				60				40				20			
壁(%)		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	
室 指 数	0.50	0.42	0.35	0.30	0.41	0.34	0.30	0.40	0.34	0.30	0.39	0.33	0.29	0.28			
	0.70	0.58	0.51	0.47	0.57	0.51	0.46	0.56	0.50	0.46	0.55	0.50	0.46	0.44			
	1.00	0.76	0.71	0.67	0.75	0.70	0.66	0.74	0.69	0.66	0.73	0.69	0.66	0.64			
	1.25	0.86	0.82	0.78	0.85	0.81	0.78	0.83	0.80	0.77	0.82	0.79	0.77	0.75			
	1.50	0.92	0.89	0.86	0.91	0.88	0.86	0.90	0.87	0.85	0.89	0.86	0.84	0.83			
	2.00	1.00	0.97	0.95	0.98	0.96	0.95	0.97	0.95	0.94	0.96	0.94	0.93	0.92			
	2.50	1.03	1.01	1.00	1.02	1.00	0.99	1.00	0.99	0.98	0.99	0.98	0.97	0.96			
	3.00	1.05	1.04	1.03	1.03	1.02	1.02	1.02	1.01	1.00	1.00	1.00	0.99	0.98			
	4.00	1.07	1.06	1.05	1.05	1.04	1.04	1.03	1.03	1.03	1.02	1.02	1.01	1.00			
	5.00	1.07	1.07	1.06	1.06	1.05	1.05	1.04	1.04	1.03	1.02	1.02	1.02	1.01			
7.00	1.08	1.08	1.07	1.06	1.06	1.06	1.04	1.04	1.04	1.02	1.02	1.02	1.01				
10.00	1.08	1.08	1.08	1.06	1.06	1.06	1.04	1.04	1.04	1.02	1.02	1.02	1.01				