



形式	CHC-LED1000H50N20		
光源	LED		
定格光束	1680	lm	
器具効率	100.0	%	
下方効率	100.0	%	
上方効率	0.0	%	
最大取付間隔			
A断面	0.4	H	
C断面	0.4	H	
B断面	0.4	H	

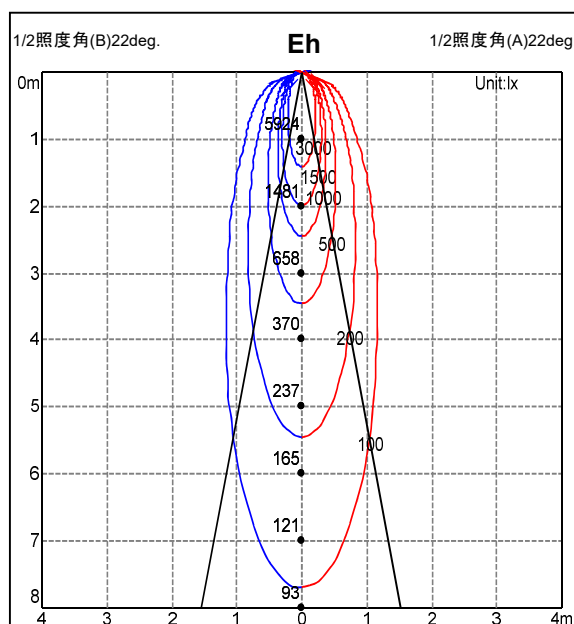

角度 [deg.]	光度 [cd/1000lm]
0	3526
10	1991
20	675
30	262
40	110
50	56
60	29
70	10
80	0
90	0
100	0
110	0
120	0
130	0
140	0
150	0
160	0
170	0
180	0

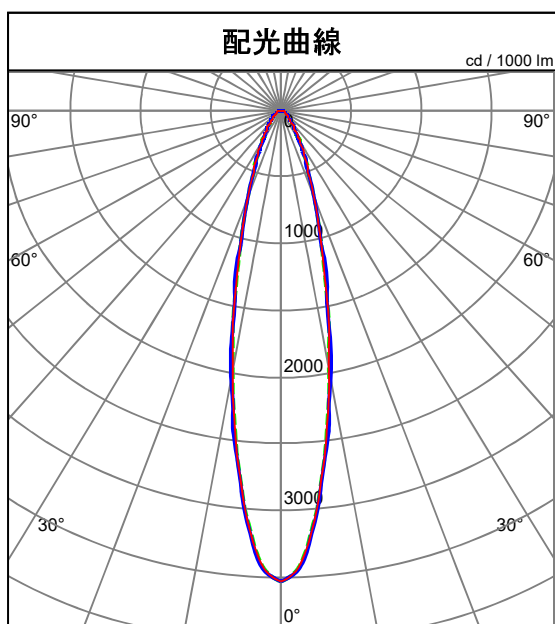

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 1680.0 / (間口 * 奥行)															
床(%)		10															
天井(%)		80				60				40				20			
壁(%)		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	
室 指 数	0.50	0.87	0.85	0.83	0.87	0.84	0.83	0.86	0.84	0.83	0.86	0.84	0.83	0.82			
	0.70	0.95	0.93	0.92	0.95	0.93	0.91	0.94	0.92	0.91	0.93	0.92	0.91	0.90			
	1.00	1.01	0.99	0.98	1.00	0.99	0.97	0.99	0.98	0.97	0.98	0.98	0.97	0.96			
	1.25	1.03	1.01	1.00	1.02	1.01	1.00	1.01	1.00	0.99	1.00	0.99	0.99	0.98			
	1.50	1.04	1.03	1.02	1.03	1.02	1.01	1.02	1.01	1.01	1.01	1.00	1.00	0.99			
	2.00	1.05	1.04	1.04	1.04	1.03	1.03	1.03	1.02	1.02	1.02	1.02	1.01	1.01	1.00		
	2.50	1.06	1.05	1.05	1.05	1.04	1.04	1.04	1.03	1.03	1.03	1.02	1.02	1.02	1.01		
	3.00	1.07	1.06	1.06	1.05	1.05	1.05	1.04	1.04	1.03	1.03	1.03	1.03	1.02	1.01		
	4.00	1.08	1.08	1.07	1.06	1.06	1.06	1.05	1.05	1.04	1.03	1.03	1.03	1.03	1.02		
	5.00	1.08	1.08	1.08	1.07	1.07	1.07	1.05	1.05	1.05	1.04	1.04	1.04	1.04	1.02		
7.00	1.09	1.09	1.09	1.07	1.07	1.07	1.05	1.05	1.06	1.04	1.04	1.04	1.04	1.02			
10.00	1.09	1.09	1.09	1.07	1.07	1.07	1.05	1.06	1.06	1.04	1.04	1.04	1.04	1.02			