

形式	SCF-LED998N-APL
----	-----------------





光源	LED
定格光束	2720 lm

器具効率	100.0 %
下方効率	84.5 %
上方効率	15.5 %

最大取付間隔		
A断面	1.7	H
C断面	1.5	H
B断面	1.4	H

角度 [deg.]	光度 [cd/1000lm]
0	238
10	234
20	222
30	205
40	183
50	157
60	129
70	101
80	75
90	55
100	42
110	32
120	24
130	16
140	10
150	6
160	2
170	0
180	0

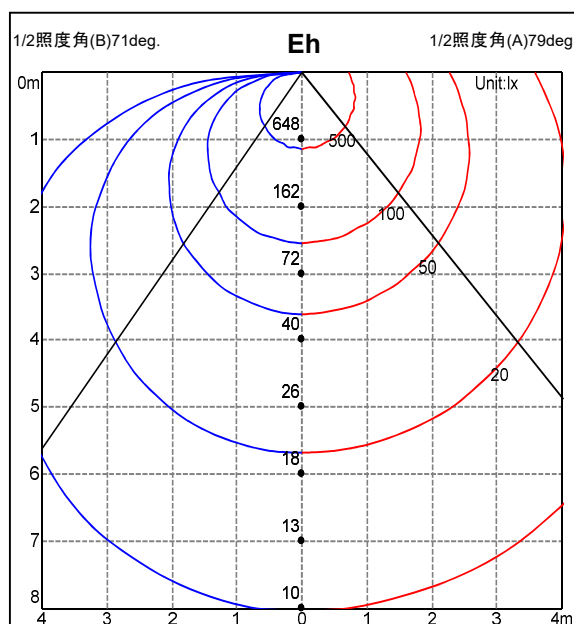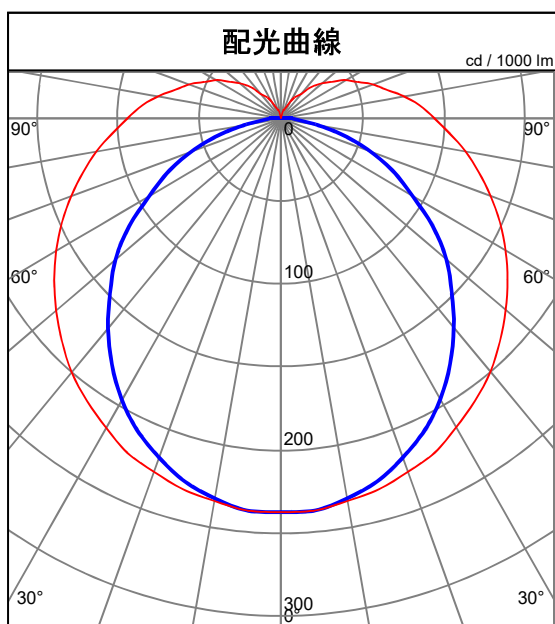

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 2720.0 / (間口 * 奥行)															
床 (%)		10															
天井 (%)		80				60				40				20			
壁 (%)		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	
室 指 数	0.50	0.35	0.28	0.23	0.33	0.26	0.22	0.31	0.25	0.21	0.29	0.24	0.20	0.18			
	0.70	0.48	0.40	0.35	0.45	0.38	0.33	0.43	0.37	0.32	0.40	0.35	0.31	0.28			
	1.00	0.62	0.55	0.49	0.59	0.53	0.48	0.56	0.50	0.46	0.53	0.48	0.44	0.41			
	1.25	0.71	0.64	0.59	0.67	0.61	0.57	0.63	0.59	0.55	0.60	0.56	0.53	0.50			
	1.50	0.77	0.71	0.66	0.73	0.68	0.63	0.69	0.65	0.61	0.65	0.62	0.59	0.56			
	2.00	0.84	0.79	0.75	0.80	0.76	0.72	0.76	0.73	0.70	0.72	0.69	0.67	0.64			
	2.50	0.89	0.85	0.81	0.84	0.81	0.78	0.80	0.77	0.75	0.76	0.74	0.72	0.68			
	3.00	0.92	0.88	0.85	0.87	0.84	0.82	0.83	0.81	0.79	0.79	0.77	0.75	0.71			
	4.00	0.96	0.93	0.90	0.91	0.89	0.87	0.86	0.84	0.83	0.82	0.80	0.79	0.75			
	5.00	0.98	0.95	0.93	0.93	0.91	0.89	0.88	0.87	0.85	0.84	0.82	0.81	0.77			
7.00	1.00	0.98	0.97	0.95	0.94	0.92	0.90	0.89	0.88	0.85	0.85	0.84	0.80				
10.00	1.02	1.01	0.99	0.96	0.96	0.95	0.91	0.91	0.90	0.87	0.86	0.86	0.81				