

形式	SC3-LED994N-APL
----	-----------------





光源	LED
定格光束	2190 lm

器具効率	100.0 %
下方効率	97.5 %
上方効率	2.5 %

最大取付間隔		
A断面	1.4	H
C断面	1.4	H
B断面	1.4	H

角度 [deg.]	光度 [cd/1000lm]
0	352
10	344
20	323
30	288
40	243
50	192
60	139
70	90
80	50
90	23
100	10
110	3
120	0
130	0
140	0
150	0
160	0
170	0
180	0

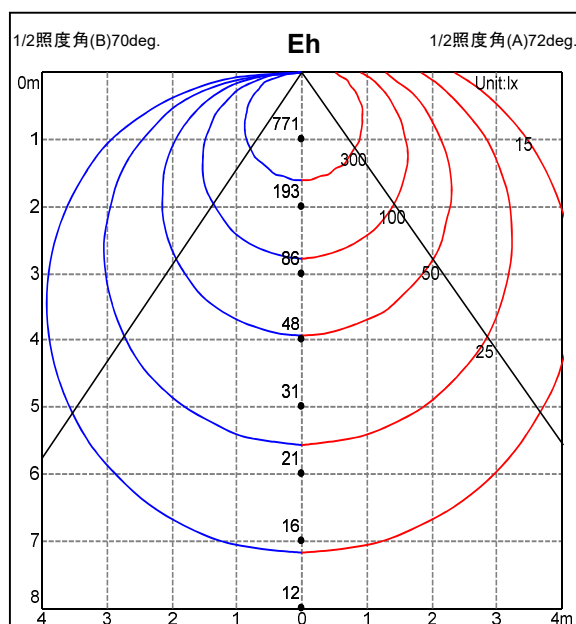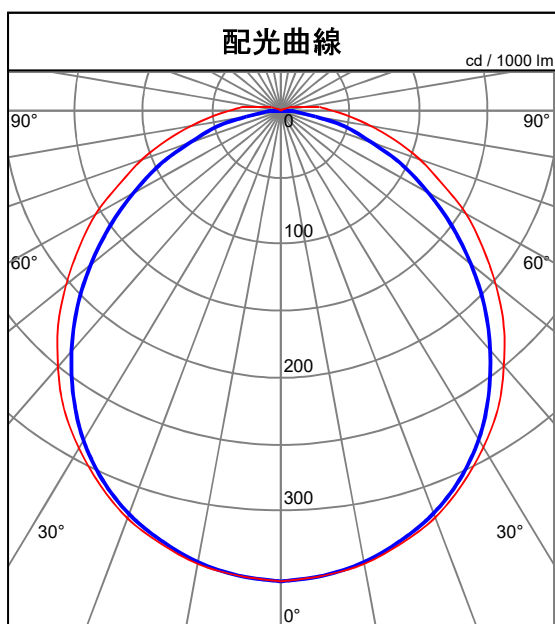

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 2190.0 / (間口 * 奥行)															
床 (%)		10															
天井 (%)		80				60				40				20			
壁 (%)		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	
室 指 数	0.50	0.40	0.33	0.28	0.39	0.33	0.28	0.38	0.32	0.28	0.37	0.32	0.28	0.26	0.26		
	0.70	0.55	0.48	0.43	0.54	0.47	0.43	0.53	0.47	0.42	0.51	0.46	0.42	0.40	0.40		
	1.00	0.72	0.65	0.61	0.70	0.64	0.60	0.68	0.63	0.60	0.67	0.63	0.59	0.57	0.57		
	1.25	0.80	0.75	0.71	0.79	0.74	0.70	0.77	0.73	0.69	0.75	0.72	0.69	0.67	0.67		
	1.50	0.86	0.82	0.78	0.85	0.81	0.77	0.83	0.79	0.76	0.81	0.78	0.76	0.74	0.74		
	2.00	0.94	0.90	0.87	0.92	0.89	0.86	0.90	0.87	0.85	0.88	0.86	0.84	0.82	0.82		
	2.50	0.97	0.95	0.92	0.95	0.93	0.91	0.93	0.91	0.90	0.91	0.90	0.88	0.87	0.87		
	3.00	1.00	0.97	0.95	0.98	0.96	0.94	0.96	0.94	0.92	0.94	0.92	0.91	0.89	0.89		
	4.00	1.02	1.01	0.99	1.00	0.99	0.97	0.98	0.97	0.96	0.96	0.95	0.94	0.92	0.92		
	5.00	1.04	1.02	1.01	1.01	1.00	0.99	0.99	0.98	0.97	0.97	0.96	0.96	0.94	0.94		
7.00	1.05	1.04	1.03	1.03	1.03	1.02	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.95	0.95		
10.00	1.06	1.06	1.05	1.04	1.03	1.03	1.03	1.01	1.01	1.00	0.99	0.98	0.98	0.96	0.96		