

形式	TRE2-1000N-DP
----	---------------





光源	LED
定格光束	3060 lm

器具効率	100.0 %
下方効率	72.7 %
上方効率	27.3 %

最大取付間隔			
A断面	2.2	H	
C断面	1.9	H	
B断面	1.5	H	

角度 [deg.]	光度 [cd/1000lm]
0	154
10	156
20	158
30	156
40	148
50	136
60	119
70	98
80	76
90	61
100	59
110	55
120	49
130	41
140	31
150	23
160	11
170	2
180	0

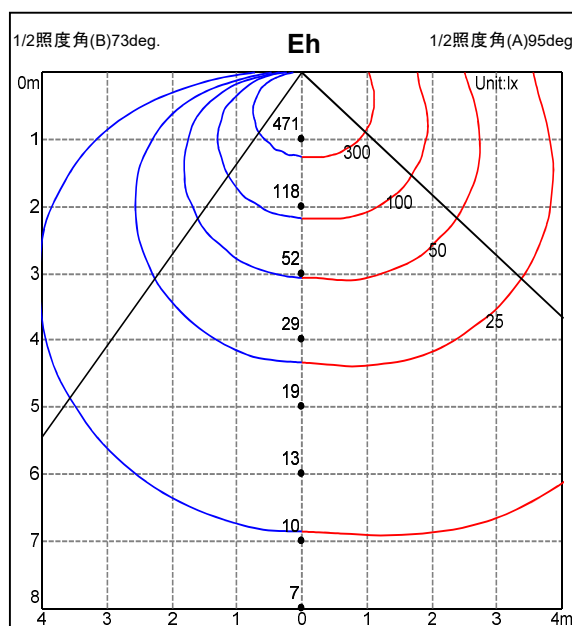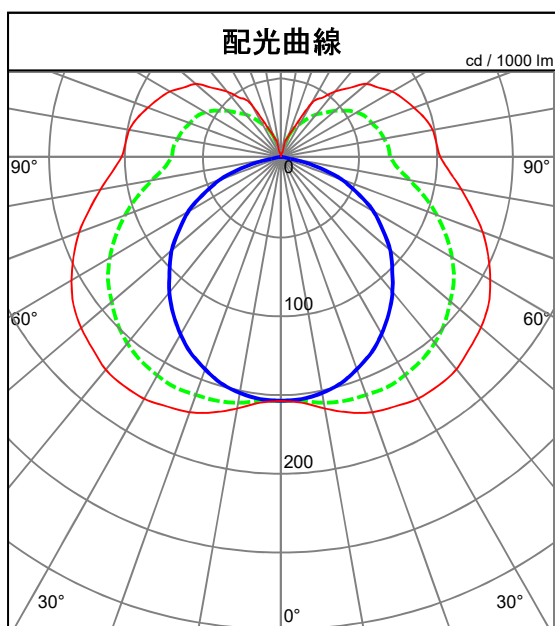

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 3060.0 / (間口 * 奥行)															
床(%)		10															
天井(%)		80				60				40				20			
壁(%)		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	
室 指 数	0.50	0.32	0.25	0.20	0.29	0.23	0.18	0.26	0.21	0.17	0.24	0.19	0.15	0.13			
	0.70	0.44	0.36	0.30	0.40	0.33	0.28	0.36	0.30	0.26	0.33	0.28	0.24	0.21			
	1.00	0.57	0.50	0.44	0.52	0.46	0.41	0.48	0.43	0.38	0.44	0.39	0.36	0.32			
	1.25	0.65	0.58	0.53	0.60	0.54	0.49	0.55	0.50	0.46	0.50	0.46	0.43	0.39			
	1.50	0.71	0.65	0.60	0.66	0.60	0.56	0.60	0.56	0.52	0.55	0.52	0.49	0.44			
	2.00	0.79	0.74	0.69	0.73	0.69	0.65	0.67	0.64	0.61	0.62	0.59	0.57	0.52			
	2.50	0.84	0.80	0.76	0.78	0.74	0.71	0.72	0.69	0.66	0.66	0.64	0.61	0.56			
	3.00	0.88	0.83	0.80	0.81	0.78	0.75	0.74	0.72	0.70	0.68	0.67	0.65	0.59			
	4.00	0.92	0.88	0.86	0.85	0.82	0.80	0.78	0.76	0.74	0.72	0.70	0.69	0.63			
	5.00	0.94	0.91	0.89	0.87	0.85	0.83	0.80	0.78	0.77	0.73	0.72	0.71	0.65			
7.00	0.97	0.95	0.93	0.89	0.88	0.86	0.82	0.81	0.80	0.75	0.75	0.74	0.67				
10.00	0.98	0.97	0.96	0.91	0.90	0.89	0.84	0.83	0.82	0.77	0.76	0.76	0.69				