

形式	FXDRGB-LED980M
----	----------------





光源	
定格光束	200 lm

器具効率	100.0 %
下方効率	87.5 %
上方効率	12.5 %

最大取付間隔			
A断面	1.5	H	
C断面	1.5	H	
B断面	1.5	H	

角度 [deg.]	光度 [cd/1000lm]
0	263
10	260
20	248
30	229
40	203
50	171
60	135
70	96
80	58
90	34
100	32
110	29
120	22
130	15
140	8
150	1
160	0
170	0
180	0

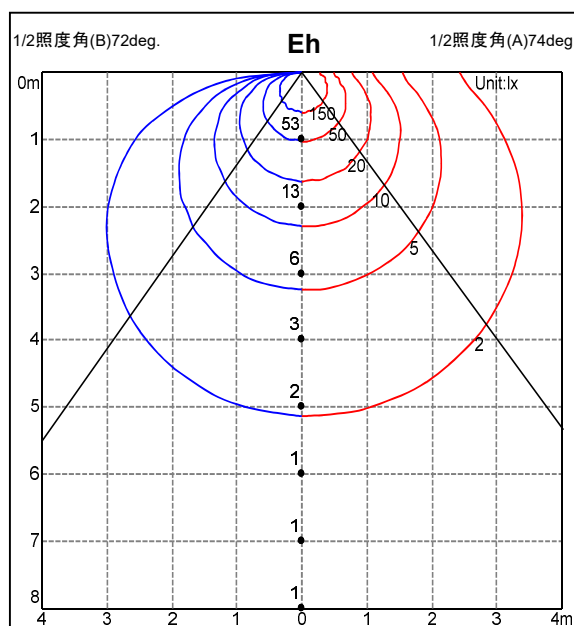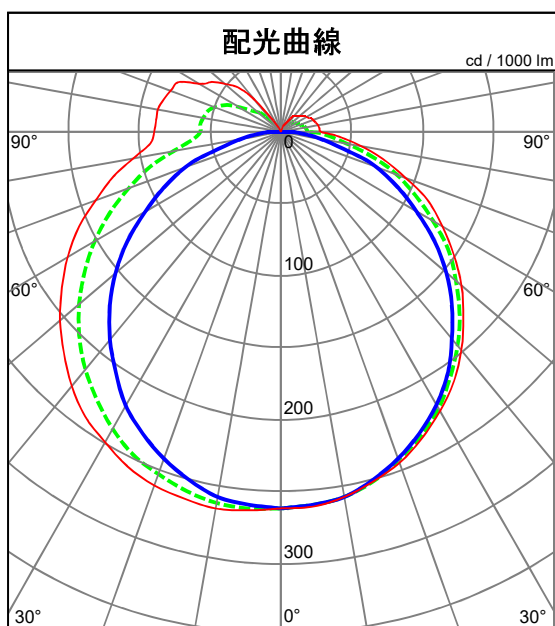

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 200.0 / (間口 * 奥行き)																
床(%)		10																
天井(%)		80				60				40				20				0
壁(%)		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
室 指 数	0.50	0.36	0.29	0.24	0.34	0.28	0.23	0.33	0.27	0.23	0.31	0.26	0.22	0.20				
	0.70	0.50	0.42	0.37	0.47	0.41	0.36	0.45	0.39	0.35	0.43	0.38	0.34	0.32				
	1.00	0.65	0.58	0.53	0.62	0.56	0.52	0.59	0.54	0.50	0.57	0.52	0.49	0.46				
	1.25	0.74	0.67	0.63	0.70	0.65	0.61	0.67	0.63	0.59	0.64	0.61	0.58	0.55				
	1.50	0.80	0.74	0.70	0.76	0.72	0.68	0.73	0.69	0.66	0.70	0.67	0.64	0.61				
	2.00	0.87	0.83	0.79	0.84	0.80	0.77	0.80	0.77	0.75	0.77	0.74	0.72	0.69				
	2.50	0.92	0.88	0.85	0.88	0.85	0.82	0.84	0.82	0.80	0.81	0.79	0.77	0.74				
	3.00	0.94	0.91	0.89	0.90	0.88	0.86	0.87	0.85	0.83	0.83	0.82	0.80	0.77				
	4.00	0.98	0.95	0.93	0.93	0.92	0.90	0.89	0.88	0.87	0.86	0.85	0.84	0.80				
	5.00	0.99	0.98	0.96	0.95	0.94	0.92	0.91	0.90	0.89	0.87	0.86	0.86	0.82				
7.00	1.01	1.00	0.99	0.97	0.96	0.95	0.93	0.92	0.91	0.89	0.88	0.88	0.87					
10.00	1.02	1.02	1.01	0.98	0.97	0.97	0.94	0.93	0.93	0.89	0.89	0.89	0.89					