



形式	LW1000N-15K		
光源	LED		
定格光束	3850	lm	
器具効率	100.0	%	
下方効率	100.0	%	
上方効率	0.0	%	
最大取付間隔			
A断面	0.2	H	
C断面	0.2	H	
B断面	0.3	H	

DNライティング株式会社

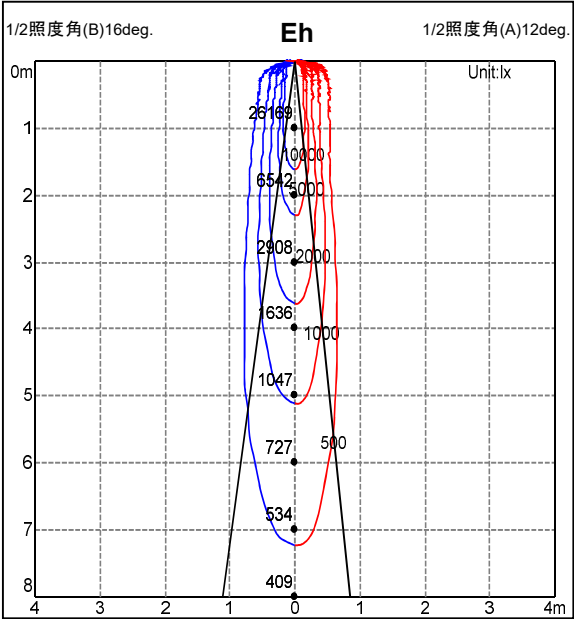

角度 [deg.]	光度 [cd/1000lm]
0	6797
10	2170
20	416
30	171
40	89
50	63
60	45
70	31
80	9
90	0
100	---
110	---
120	---
130	---
140	---
150	---
160	---
170	---
180	---

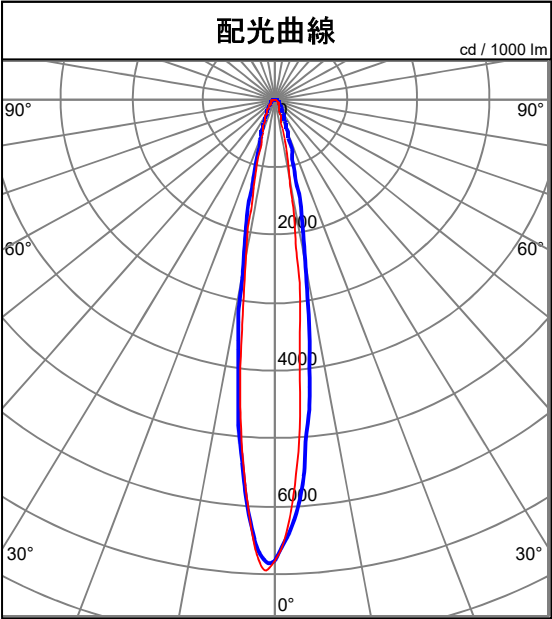

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 3850.0 / (間口 * 奥行き)												
床(%)		10												0
天井(%)		80			60			40			20			0
壁(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室 指 数	0.50	0.67	0.63	0.60	0.67	0.63	0.60	0.66	0.62	0.60	0.65	0.62	0.60	0.58
	0.70	0.85	0.82	0.79	0.84	0.81	0.79	0.83	0.81	0.79	0.83	0.80	0.79	0.78
	1.00	0.96	0.93	0.92	0.95	0.93	0.91	0.94	0.92	0.91	0.93	0.92	0.91	0.90
	1.25	0.98	0.96	0.95	0.97	0.96	0.94	0.96	0.95	0.94	0.96	0.94	0.93	0.92
	1.50	0.99	0.98	0.96	0.98	0.97	0.95	0.97	0.96	0.95	0.96	0.95	0.94	0.93
	2.00	1.01	0.99	0.98	1.00	0.98	0.97	0.98	0.97	0.96	0.97	0.96	0.95	0.94
	2.50	1.03	1.01	1.00	1.01	1.00	0.99	1.00	0.99	0.98	0.98	0.98	0.97	0.96
	3.00	1.04	1.03	1.02	1.02	1.01	1.01	1.01	1.00	0.99	0.99	0.99	0.98	0.97
	4.00	1.06	1.05	1.05	1.04	1.04	1.03	1.03	1.02	1.02	1.01	1.01	1.01	0.99
	5.00	1.07	1.07	1.06	1.05	1.05	1.05	1.04	1.04	1.03	1.02	1.02	1.02	1.01
	7.00	1.08	1.08	1.08	1.06	1.07	1.07	1.05	1.05	1.05	1.03	1.03	1.03	1.02
	10.00	1.09	1.09	1.09	1.07	1.07	1.07	1.05	1.05	1.05	1.03	1.04	1.04	1.02