

配光特性

No. : DN24D0502BF

形式	SW1-N15C
----	----------

光源	LED
定格光束	230 lm



器具効率	100.0 %
下方効率	100.0 %
上方効率	0.0 %

最大取付間隔

A断面	0.2 H
C断面	0.2 H
B断面	0.3 H

DNライティング株式会社

角度 [deg.]	光度 [cd/1000lm]
0	9485
10	2758
20	434
30	137
40	44
50	21
60	0
70	0
80	0
90	0
100	---
110	---
120	---
130	---
140	---
150	---
160	---
170	---
180	---

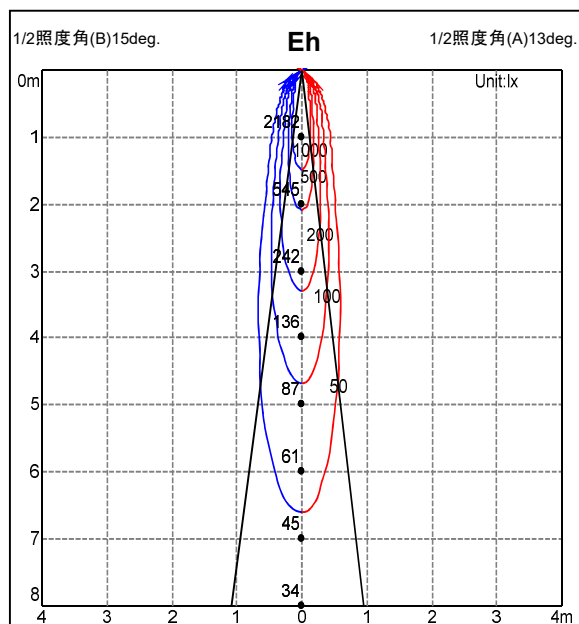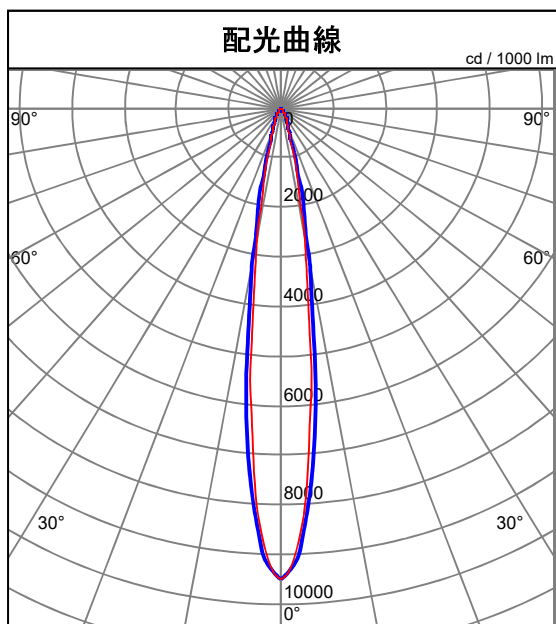

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 230.0 / (間口 * 奥行き)													
床(%)		10													
天井(%)		80				60				40				20	
壁(%)		50	30	10	50	30	10	50	30	10	50	30	10	50	0
室 指 数	0.50	0.77	0.74	0.71	0.77	0.73	0.71	0.76	0.73	0.71	0.76	0.73	0.71	0.70	0.70
	0.70	0.96	0.94	0.93	0.95	0.94	0.92	0.95	0.93	0.92	0.94	0.93	0.92	0.91	0.91
	1.00	1.05	1.04	1.03	1.04	1.04	1.03	1.04	1.03	1.03	1.03	1.03	1.02	1.02	1.02
	1.25	1.06	1.05	1.04	1.05	1.04	1.04	1.04	1.03	1.03	1.03	1.03	1.03	1.03	1.02
	1.50	1.05	1.04	1.03	1.04	1.03	1.02	1.03	1.02	1.02	1.02	1.02	1.01	1.01	1.00
	2.00	1.04	1.03	1.02	1.03	1.02	1.01	1.02	1.01	1.00	1.01	1.00	0.99	0.98	0.98
	2.50	1.05	1.04	1.03	1.03	1.02	1.02	1.02	1.01	1.01	1.01	1.00	1.00	0.99	0.98
	3.00	1.06	1.05	1.04	1.04	1.03	1.03	1.03	1.02	1.01	1.01	1.01	1.00	0.99	0.99
	4.00	1.07	1.07	1.06	1.06	1.05	1.05	1.04	1.04	1.04	1.03	1.02	1.02	1.01	1.01
	5.00	1.08	1.08	1.08	1.07	1.07	1.06	1.05	1.05	1.05	1.04	1.04	1.04	1.03	1.02
	7.00	1.10	1.10	1.10	1.08	1.08	1.08	1.06	1.06	1.06	1.04	1.05	1.05	1.03	1.03
	10.00	1.10	1.10	1.11	1.08	1.08	1.09	1.06	1.07	1.07	1.05	1.05	1.05	1.05	1.04