
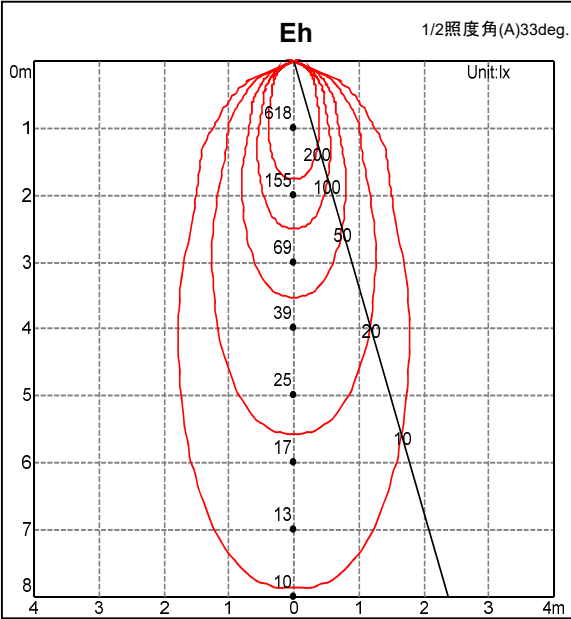
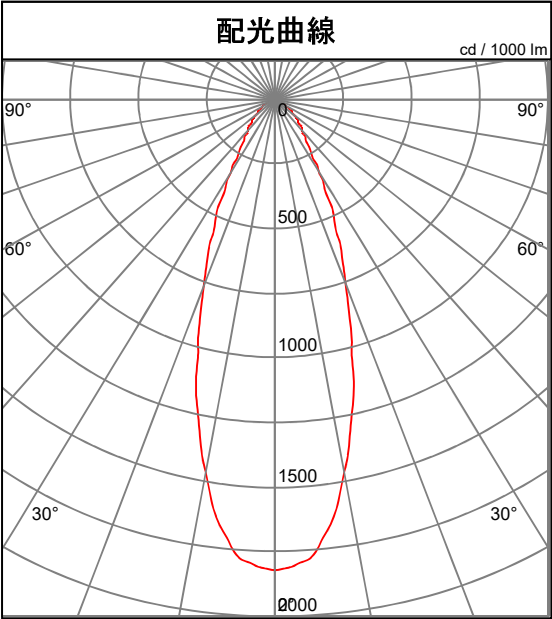


形式	D-EX162WBH		
光源	LED		
定格光束	340	lm	
器具効率	100.0	%	
下方効率	100.0	%	
上方効率	0.0	%	
最大取付間隔			
A断面	0.6	H	

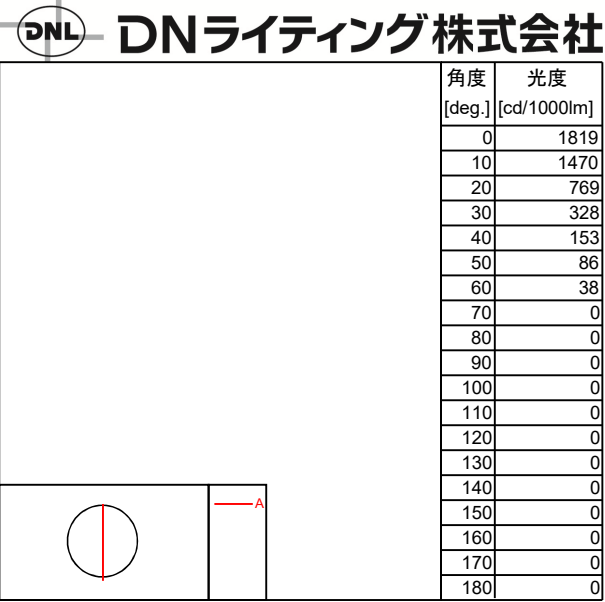

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 340.0 / (間口 * 奥行き)												
床(%)		10												
天井(%)		80			60			40			20			0
壁(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室 指 数	0.50	0.38	0.30	0.25	0.37	0.30	0.25	0.36	0.29	0.25	0.35	0.29	0.25	0.23
	0.70	0.42	0.33	0.27	0.41	0.33	0.27	0.40	0.32	0.27	0.38	0.32	0.27	0.24
	1.00	0.47	0.36	0.28	0.44	0.35	0.28	0.43	0.34	0.28	0.41	0.33	0.27	0.25
	1.25	0.49	0.38	0.29	0.47	0.37	0.29	0.44	0.35	0.28	0.42	0.34	0.28	0.25
	1.50	0.51	0.39	0.30	0.48	0.38	0.29	0.46	0.36	0.29	0.43	0.35	0.28	0.25
	2.00	0.54	0.41	0.31	0.51	0.39	0.30	0.47	0.38	0.29	0.44	0.36	0.29	0.25
	2.50	0.56	0.43	0.31	0.52	0.41	0.31	0.49	0.39	0.30	0.45	0.37	0.29	0.25
	3.00	0.57	0.44	0.32	0.53	0.41	0.31	0.49	0.39	0.30	0.46	0.37	0.29	0.25
	4.00	0.59	0.45	0.33	0.54	0.43	0.32	0.50	0.40	0.31	0.47	0.38	0.30	0.25
	5.00	0.60	0.46	0.33	0.55	0.43	0.32	0.51	0.41	0.31	0.47	0.38	0.30	0.25
	7.00	0.61	0.47	0.33	0.56	0.44	0.32	0.52	0.41	0.31	0.48	0.39	0.30	0.25
	10.00	0.62	0.48	0.34	0.57	0.45	0.33	0.52	0.42	0.31	0.48	0.39	0.30	0.25