

形式	SO3-LEDN1000N
----	---------------





光源	
定格光束	2640 lm

器具効率	100.0 %
下方効率	94.4 %
上方効率	5.6 %

最大取付間隔		
A断面	0.4 H	H
C断面	1.1 H	H
B断面	1.1 H	H

角度 [deg.]	光度 [cd/1000lm]
0	1017
10	784
20	503
30	332
40	216
50	137
60	87
70	54
80	34
90	25
100	19
110	14
120	7
130	4
140	3
150	0
160	0
170	0
180	0

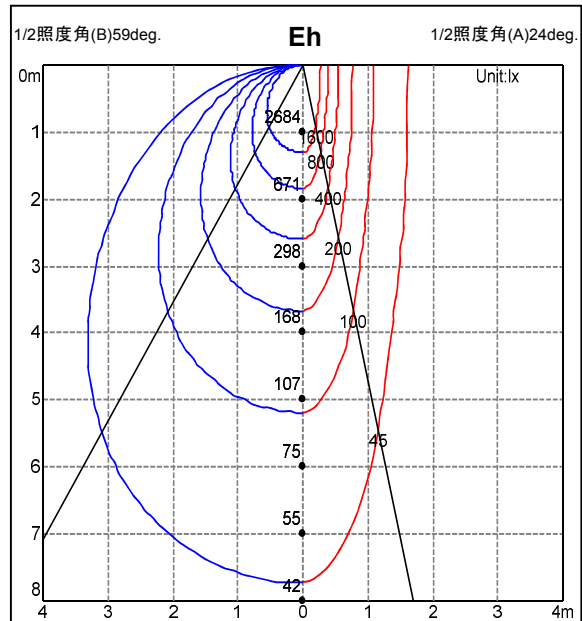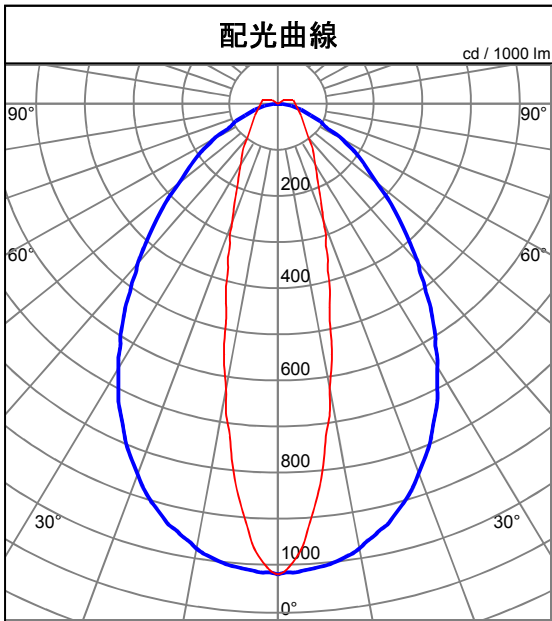

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 2640.0 / (間口 * 奥行)															
床(%)		10															
天井(%)		80				60				40				20			
壁(%)		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	
室 指 数	0.50	0.54	0.48	0.44	0.53	0.47	0.43	0.52	0.46	0.43	0.50	0.46	0.42	0.41			
	0.70	0.71	0.65	0.61	0.70	0.64	0.61	0.68	0.63	0.60	0.67	0.63	0.60	0.58			
	1.00	0.86	0.81	0.78	0.84	0.80	0.77	0.82	0.79	0.76	0.80	0.77	0.75	0.73			
	1.25	0.92	0.88	0.85	0.90	0.87	0.84	0.88	0.85	0.83	0.86	0.84	0.82	0.80			
	1.50	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.89	0.87	0.90	0.88	0.86	0.84			
	2.00	1.01	0.98	0.96	0.99	0.96	0.94	0.96	0.94	0.92	0.94	0.92	0.91	0.89			
	2.50	1.04	1.01	0.99	1.01	0.99	0.97	0.99	0.97	0.95	0.96	0.95	0.94	0.91			
	3.00	1.06	1.03	1.02	1.03	1.01	0.99	1.00	0.99	0.97	0.98	0.96	0.95	0.93			
	4.00	1.08	1.06	1.05	1.05	1.04	1.02	1.02	1.01	1.00	0.99	0.99	0.98	0.95			
	5.00	1.09	1.08	1.07	1.06	1.05	1.04	1.03	1.02	1.02	1.00	1.00	0.99	0.97			
	7.00	1.11	1.10	1.09	1.07	1.07	1.06	1.04	1.04	1.03	1.01	1.01	1.01	0.98			
	10.00	1.12	1.11	1.10	1.08	1.08	1.07	1.05	1.05	1.04	1.02	1.02	1.02	0.99			