

配光特性

No. : DN25J3105BB




形式	TIEG1003H50WW4-APL
----	--------------------



光源	LED
定格光束	1920 lm

器具効率	100.0 %
下方効率	100.0 %
上方効率	0.0 %

最大取付間隔		
A断面	0.7 H	
C断面	0.7 H	
B断面	0.7 H	

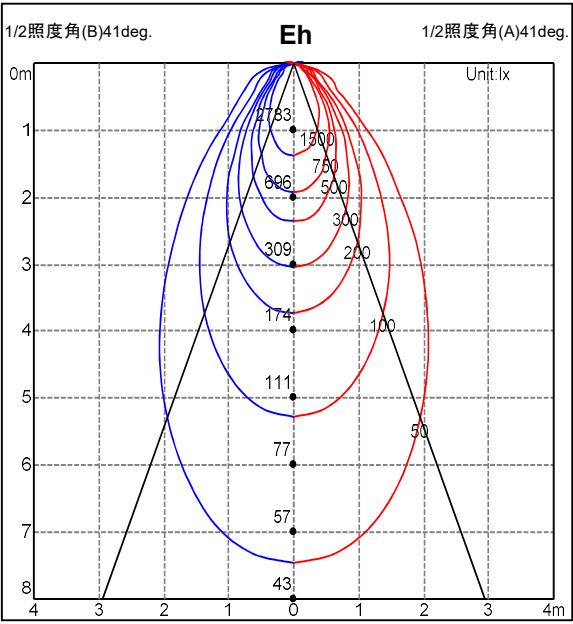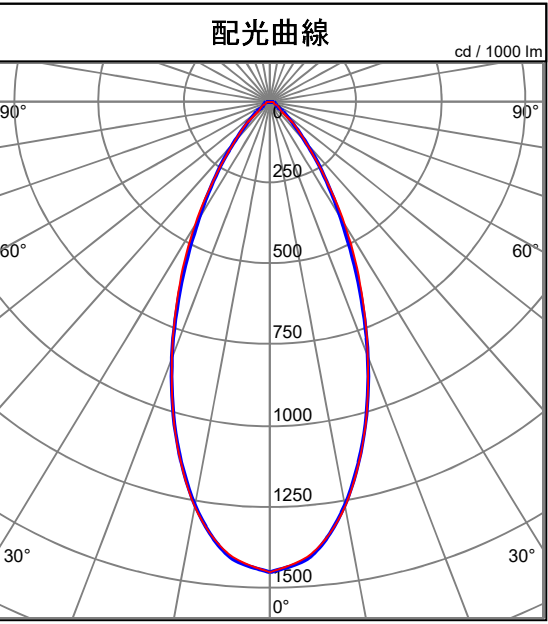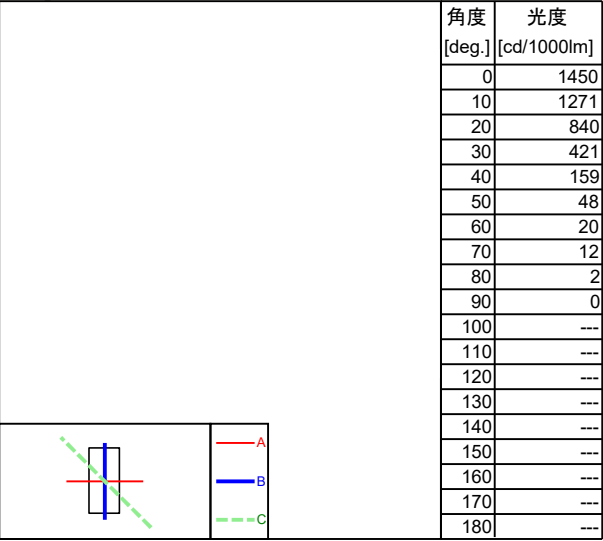

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 1920.0 / (間口 * 奥行)												
床(%)		10												
天井(%)		80				60				40				0
壁(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室 指 数	0.50	0.71	0.67	0.64	0.70	0.66	0.64	0.70	0.66	0.64	0.69	0.66	0.64	0.63
	0.70	0.89	0.87	0.85	0.89	0.86	0.84	0.88	0.86	0.84	0.88	0.86	0.84	0.83
	1.00	1.00	0.98	0.97	0.99	0.98	0.97	0.99	0.97	0.96	0.98	0.97	0.96	0.95
	1.25	1.02	1.01	1.00	1.01	1.00	0.99	1.01	1.00	0.99	1.00	0.99	0.99	0.98
	1.50	1.03	1.02	1.00	1.02	1.01	1.00	1.01	1.00	0.99	1.00	1.00	0.99	0.98
	2.00	1.04	1.02	1.01	1.02	1.01	1.00	1.01	1.00	0.99	1.00	1.00	0.99	0.97
	2.50	1.04	1.03	1.02	1.03	1.02	1.01	1.02	1.01	1.00	1.01	1.00	1.00	0.98
	3.00	1.05	1.04	1.04	1.04	1.03	1.02	1.02	1.02	1.01	1.02	1.01	1.01	0.99
	4.00	1.07	1.06	1.06	1.05	1.05	1.05	1.04	1.03	1.03	1.03	1.03	1.02	1.01
	5.00	1.08	1.08	1.07	1.06	1.06	1.06	1.05	1.05	1.04	1.04	1.04	1.04	1.02
	7.00	1.09	1.09	1.09	1.07	1.07	1.07	1.05	1.06	1.06	1.05	1.05	1.05	1.02
	10.00	1.10	1.10	1.10	1.08	1.08	1.08	1.06	1.06	1.06	1.05	1.05	1.05	1.03