




形式	TFL-LED848N
----	-------------



光源	
定格光束	1380 lm

器具効率	100.0 %
下方効率	86.1 %
上方効率	13.9 %

最大取付間隔			
A断面	1.6	H	
C断面	1.5	H	
B断面	1.5	H	

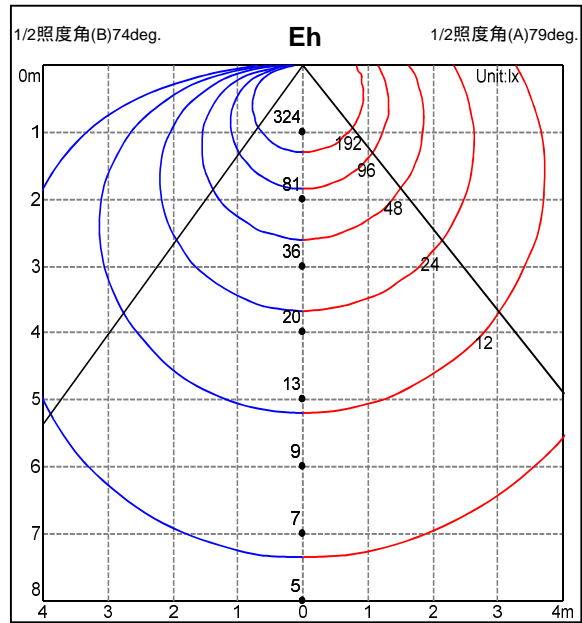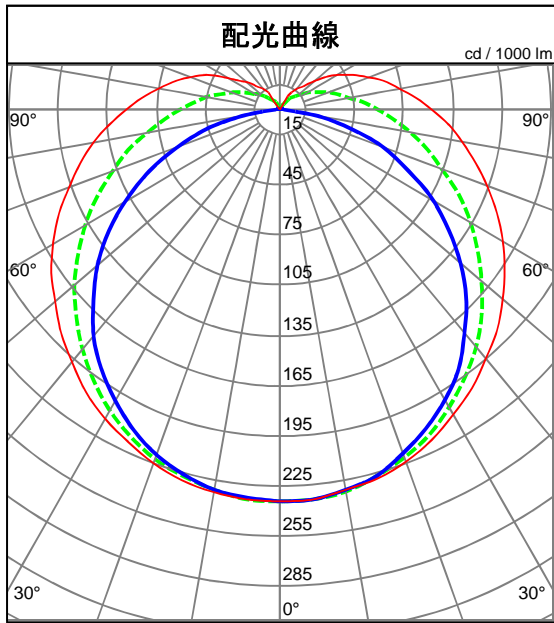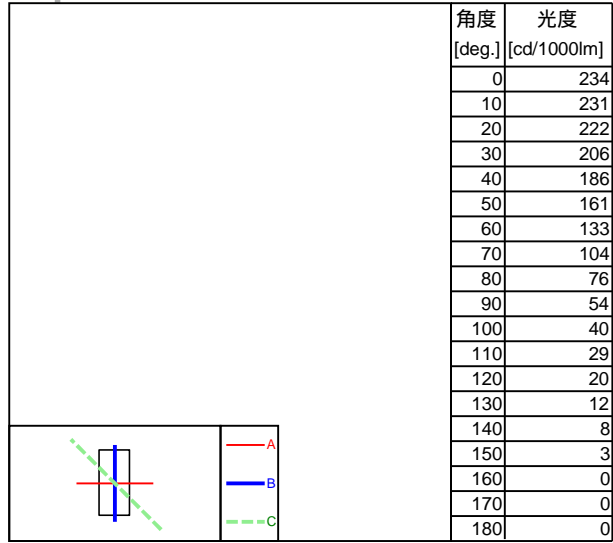

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 1380.0 / (間口 * 奥行)																
床(%)		10																
天井(%)		80				60				40				20				0
壁(%)		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
室 指 数	0.50	0.34	0.27	0.22	0.32	0.26	0.21	0.30	0.24	0.20	0.29	0.23	0.19	0.17				
	0.70	0.47	0.39	0.33	0.44	0.37	0.32	0.42	0.35	0.31	0.39	0.34	0.30	0.27				
	1.00	0.61	0.53	0.47	0.57	0.51	0.46	0.54	0.49	0.44	0.51	0.47	0.43	0.40				
	1.25	0.69	0.62	0.56	0.65	0.59	0.55	0.62	0.57	0.53	0.59	0.54	0.51	0.48				
	1.50	0.75	0.69	0.63	0.71	0.66	0.61	0.68	0.63	0.59	0.64	0.60	0.57	0.54				
	2.00	0.83	0.78	0.73	0.79	0.75	0.71	0.75	0.71	0.68	0.71	0.69	0.66	0.62				
	2.50	0.88	0.84	0.80	0.84	0.80	0.77	0.80	0.77	0.74	0.76	0.73	0.71	0.68				
	3.00	0.91	0.87	0.84	0.87	0.84	0.81	0.83	0.80	0.78	0.79	0.77	0.75	0.71				
	4.00	0.95	0.92	0.90	0.91	0.88	0.86	0.86	0.84	0.83	0.82	0.81	0.79	0.75				
	5.00	0.97	0.95	0.93	0.93	0.91	0.89	0.88	0.87	0.85	0.84	0.83	0.82	0.78				
7.00	1.00	0.98	0.96	0.95	0.94	0.92	0.90	0.89	0.88	0.86	0.85	0.84	0.80					
10.00	1.01	1.00	0.99	0.97	0.96	0.95	0.92	0.91	0.90	0.87	0.87	0.86	0.82					