

形式	D-EX91WF
----	----------





光源	—
定格光束	310 lm

器具効率	100.0 %
下方効率	100.0 %
上方効率	0.0 %

最大取付間隔	
A断面	1.4 H

角度 [deg.]	光度 [cd/1000lm]
0	410
10	402
20	375
30	332
40	274
50	204
60	134
70	73
80	23
90	0
100	---
110	---
120	---
130	---
140	---
150	---
160	---
170	---
180	---

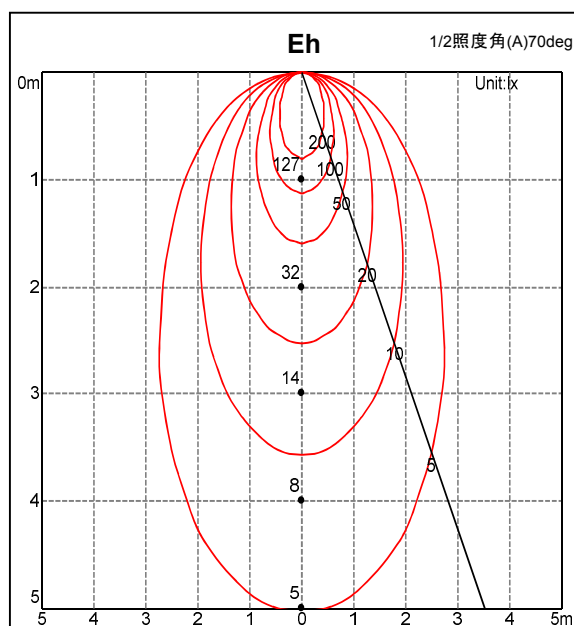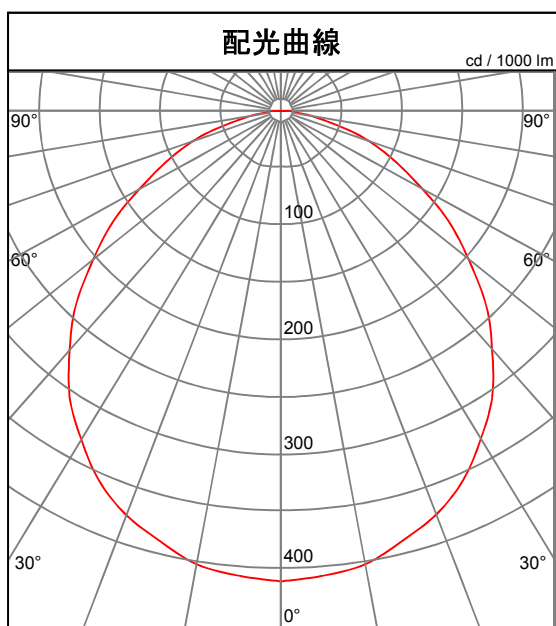

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 310.0 / (間口 * 奥行き)															
床 (%)		10															
天井 (%)		80				60				40				20			
壁 (%)		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	
室 指 数	0.50	0.44	0.37	0.32	0.43	0.36	0.32	0.42	0.36	0.32	0.41	0.36	0.32	0.30			
	0.70	0.60	0.53	0.49	0.59	0.53	0.49	0.58	0.52	0.48	0.57	0.52	0.48	0.47			
	1.00	0.77	0.72	0.68	0.76	0.71	0.68	0.75	0.71	0.67	0.74	0.70	0.67	0.65			
	1.25	0.86	0.82	0.78	0.85	0.81	0.78	0.84	0.80	0.78	0.82	0.79	0.77	0.76			
	1.50	0.92	0.89	0.86	0.91	0.88	0.85	0.89	0.87	0.84	0.88	0.86	0.84	0.83			
	2.00	0.99	0.96	0.94	0.97	0.95	0.93	0.96	0.94	0.92	0.94	0.93	0.92	0.90			
	2.50	1.02	1.00	0.98	1.00	0.99	0.97	0.99	0.98	0.96	0.97	0.96	0.95	0.94			
	3.00	1.04	1.02	1.01	1.02	1.01	1.00	1.00	1.00	0.99	0.99	0.98	0.98	0.96			
	4.00	1.05	1.04	1.04	1.04	1.03	1.02	1.02	1.01	1.01	1.01	1.01	1.00	1.00	0.98		
	5.00	1.06	1.06	1.05	1.05	1.04	1.03	1.03	1.02	1.02	1.02	1.01	1.01	1.00	0.99		
7.00	1.07	1.07	1.06	1.06	1.05	1.04	1.03	1.03	1.03	1.03	1.02	1.01	1.01	1.00			
10.00	1.08	1.07	1.07	1.07	1.06	1.05	1.05	1.04	1.03	1.03	1.02	1.02	1.02	1.00			