

形式	HA-LEDW900A-N
----	---------------





光源	
定格光束	1710 lm

器具効率	100.0 %
下方効率	98.6 %
上方効率	1.4 %

最大取付間隔		
A断面	1.5	H
C断面	1.5	H
B断面	1.4	H

角度 [deg.]	光度 [cd/1000lm]
0	325
10	320
20	305
30	278
40	241
50	196
60	147
70	99
80	56
90	25
100	2
110	0
120	0
130	0
140	0
150	0
160	0
170	0
180	0

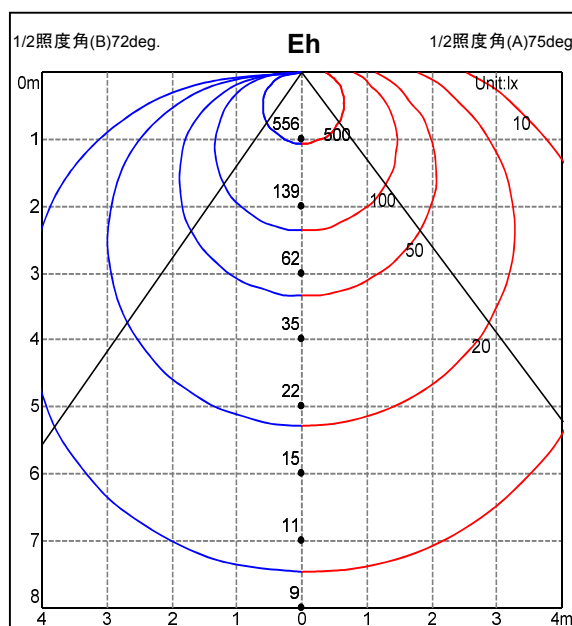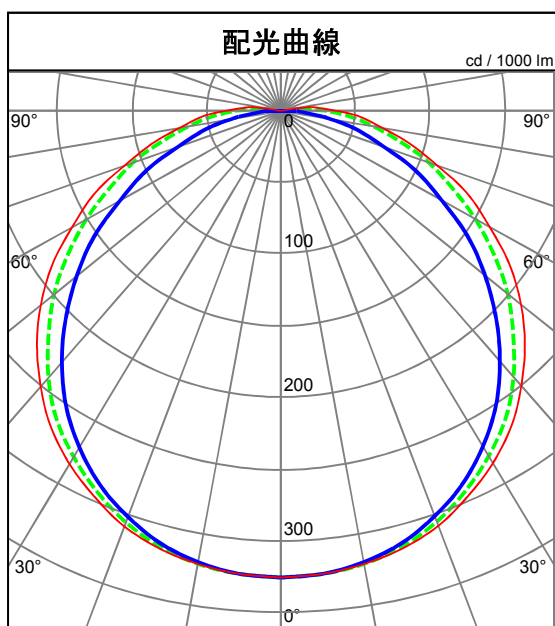

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 1710.0 / (間口 * 奥行き)																
床(%)		10																
天井(%)		80				60				40				20				0
壁(%)		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
室 指 数	0.50	0.39	0.32	0.27	0.38	0.31	0.26	0.37	0.31	0.26	0.36	0.30	0.26	0.24				
	0.70	0.54	0.46	0.41	0.52	0.46	0.41	0.51	0.45	0.41	0.50	0.44	0.40	0.38				
	1.00	0.70	0.64	0.59	0.69	0.63	0.58	0.67	0.62	0.58	0.65	0.61	0.57	0.55				
	1.25	0.79	0.74	0.69	0.77	0.72	0.69	0.76	0.71	0.68	0.74	0.70	0.67	0.65				
	1.50	0.85	0.81	0.77	0.84	0.79	0.76	0.82	0.78	0.75	0.80	0.77	0.74	0.73				
	2.00	0.93	0.89	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.87	0.85	0.83	0.81				
	2.50	0.97	0.94	0.92	0.95	0.93	0.90	0.93	0.91	0.89	0.91	0.90	0.88	0.86				
	3.00	1.00	0.97	0.95	0.97	0.95	0.94	0.96	0.94	0.92	0.94	0.92	0.91	0.89				
	4.00	1.02	1.01	0.99	1.00	0.99	0.97	0.98	0.97	0.96	0.96	0.95	0.94	0.92				
5.00	1.04	1.02	1.01	1.02	1.00	0.99	0.99	0.99	0.98	0.97	0.97	0.96	0.94					
7.00	1.05	1.04	1.03	1.03	1.03	1.02	1.01	1.01	1.00	1.00	0.99	0.98	0.98	0.96				
10.00	1.06	1.06	1.05	1.04	1.03	1.03	1.03	1.02	1.01	1.01	1.00	0.99	0.99	0.97				