

形式	R-EX12WB
----	----------





光源	
定格光束	55 lm

器具効率	100.0 %
下方効率	100.0 %
上方効率	0.0 %

最大取付間隔	
A断面	0.4 H

角度 [deg.]	光度 [cd/1000lm]
0	4875
10	2653
20	589
30	147
40	47
50	31
60	25
70	16
80	9
90	0
100	---
110	---
120	---
130	---
140	---
150	---
160	---
170	---
180	---

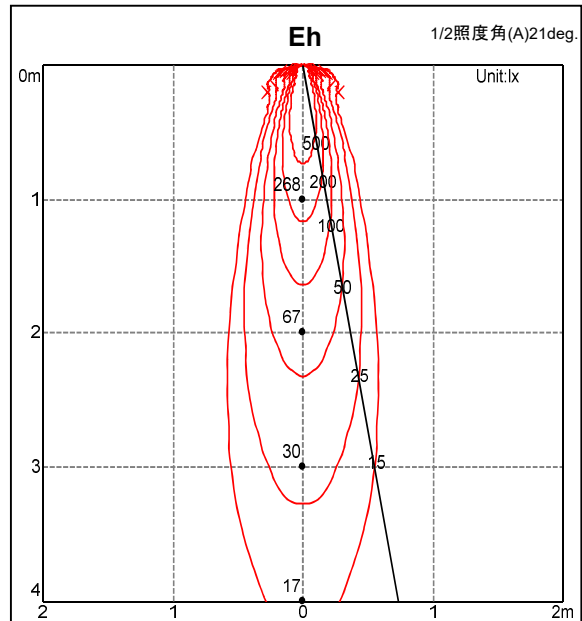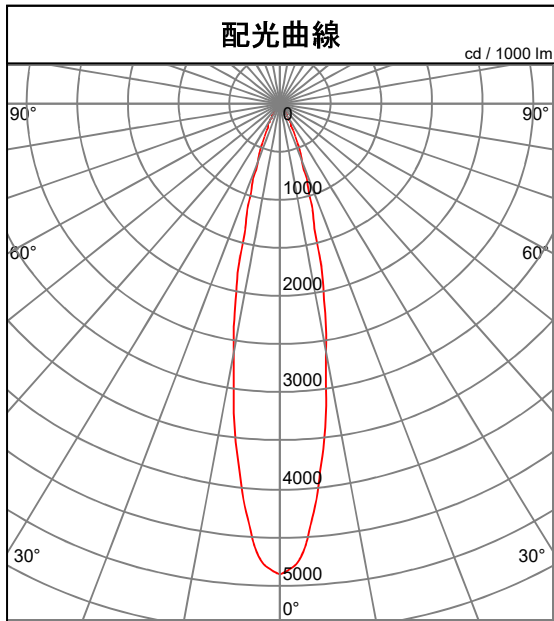

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 55.0 / (間口 * 奥行き)															
床 (%)		10															
天井 (%)		80				60				40				20			
壁 (%)		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	
室 指 数	0.50	0.73	0.69	0.67	0.73	0.69	0.67	0.72	0.69	0.67	0.72	0.69	0.66	0.66	0.66		
	0.70	0.91	0.89	0.87	0.91	0.88	0.87	0.90	0.88	0.87	0.90	0.88	0.86	0.86	0.86		
	1.00	1.01	0.99	0.98	1.00	0.99	0.98	0.99	0.98	0.97	0.99	0.98	0.97	0.96	0.96		
	1.25	1.02	1.01	0.99	1.01	1.00	0.99	1.00	0.99	0.98	0.99	0.99	0.98	0.97	0.97		
	1.50	1.02	1.01	0.99	1.01	1.00	0.99	1.00	0.99	0.98	0.99	0.98	0.97	0.96	0.96		
	2.00	1.03	1.01	1.00	1.01	1.00	0.99	1.00	0.99	0.98	0.99	0.98	0.97	0.96	0.96		
	2.50	1.04	1.02	1.01	1.02	1.01	1.00	1.01	1.00	0.99	0.99	0.99	0.98	0.97	0.97		
	3.00	1.05	1.04	1.03	1.03	1.03	1.02	1.02	1.01	1.01	1.01	1.01	1.00	0.99	0.98		
	4.00	1.07	1.06	1.06	1.05	1.05	1.05	1.04	1.03	1.03	1.02	1.02	1.02	1.02	1.01		
	5.00	1.08	1.08	1.08	1.07	1.06	1.06	1.05	1.05	1.05	1.03	1.03	1.03	1.03	1.02		
7.00	1.10	1.10	1.10	1.08	1.08	1.08	1.06	1.06	1.06	1.04	1.04	1.05	1.05	1.03			
10.00	1.10	1.10	1.11	1.08	1.08	1.08	1.06	1.07	1.07	1.05	1.05	1.05	1.05	1.04			