



形式	R-EX14WB		
光源			
定格光束	50	lm	
器具効率	100.0	%	
下方効率	100.0	%	
上方効率	0.0	%	
最大取付間隔			
A断面	0.4	H	

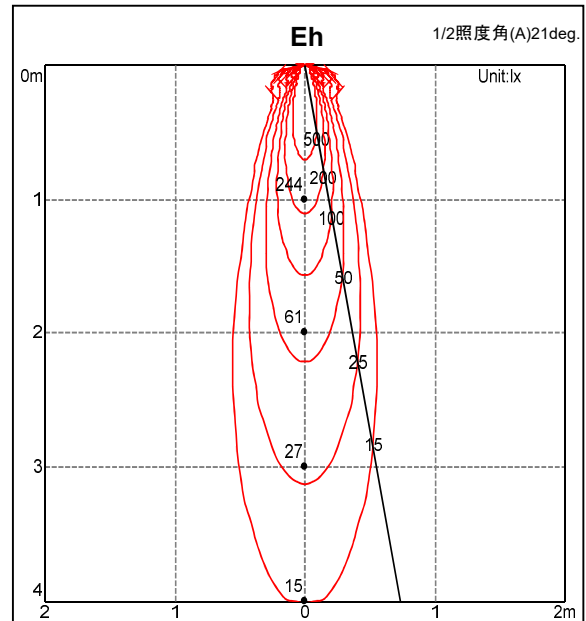

角度 [deg.]	光度 [cd/1000lm]
0	4874
10	2654
20	588
30	148
40	48
50	32
60	26
70	18
80	8
90	0
100	---
110	---
120	---
130	---
140	---
150	---
160	---
170	---
180	---

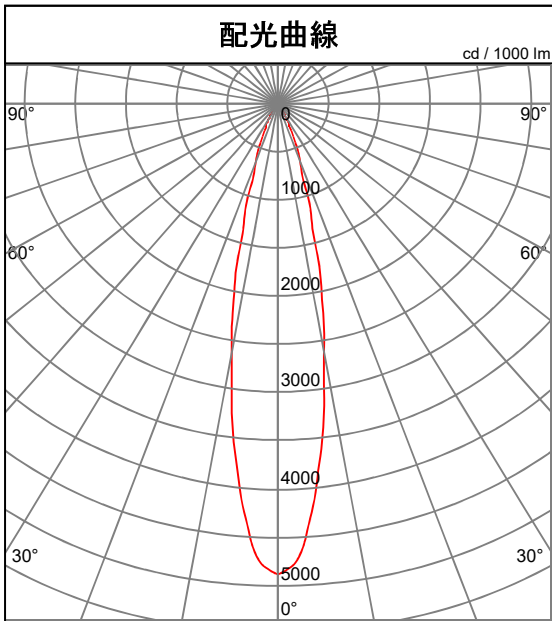

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 50.0 / (間口 * 奥行き)																
床(%)		10																
天井(%)		80				60				40				20				0
壁(%)		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
室 指 数	0.50	0.73	0.69	0.67	0.73	0.69	0.67	0.72	0.69	0.67	0.72	0.69	0.66	0.66				
	0.70	0.91	0.89	0.87	0.91	0.88	0.87	0.90	0.88	0.87	0.90	0.88	0.86	0.86				
	1.00	1.01	0.99	0.98	1.00	0.99	0.98	0.99	0.98	0.97	0.99	0.98	0.97	0.96				
	1.25	1.02	1.01	0.99	1.01	1.00	0.99	1.00	0.99	0.98	0.99	0.99	0.98	0.97				
	1.50	1.02	1.01	0.99	1.01	1.00	0.99	1.00	0.99	0.98	0.99	0.98	0.97	0.97				
	2.00	1.03	1.01	1.00	1.01	1.00	0.99	1.00	0.99	0.98	0.99	0.98	0.97	0.96				
	2.50	1.04	1.02	1.01	1.02	1.01	1.00	1.01	1.00	0.99	1.00	0.99	0.98	0.97				
	3.00	1.05	1.04	1.03	1.03	1.03	1.02	1.02	1.01	1.01	1.01	1.01	1.00	1.00	0.98			
	4.00	1.07	1.07	1.06	1.05	1.05	1.05	1.04	1.04	1.03	1.02	1.02	1.02	1.02	1.01			
	5.00	1.08	1.08	1.08	1.07	1.07	1.06	1.05	1.05	1.05	1.03	1.03	1.03	1.03	1.02			
7.00	1.10	1.10	1.10	1.08	1.08	1.08	1.06	1.06	1.06	1.04	1.04	1.04	1.04	1.03				
10.00	1.10	1.10	1.11	1.08	1.09	1.09	1.06	1.07	1.07	1.05	1.05	1.05	1.05	1.04				