

形式	R-EX24WB
----	----------





光源	
定格光束	100 lm

器具効率	100.0 %
下方効率	100.0 %
上方効率	0.0 %

最大取付間隔	
A断面	0.3 H

角度 [deg.]	光度 [cd/1000lm]
0	6857
10	2751
20	562
30	176
40	35
50	13
60	6
70	4
80	1
90	0
100	---
110	---
120	---
130	---
140	---
150	---
160	---
170	---
180	---

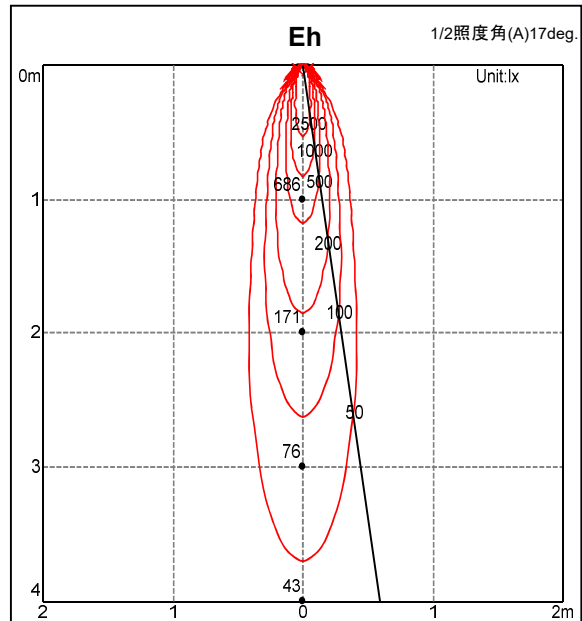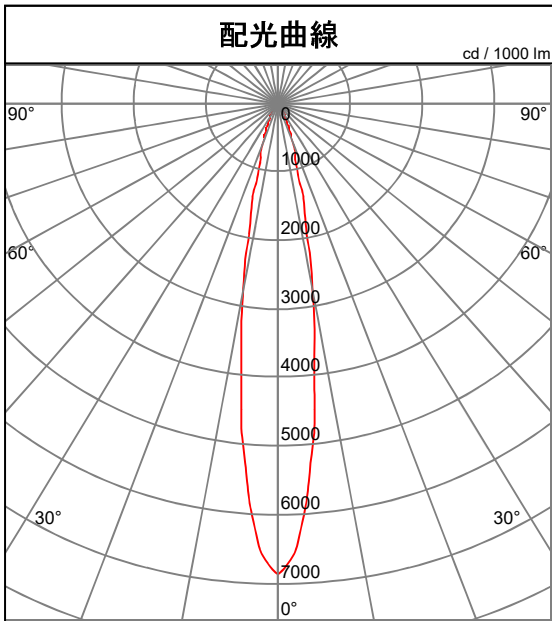

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 100.0 / (間口 * 奥行)															
床 (%)		10															
天井 (%)		80				60				40				20			
壁 (%)		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	
室 指 数	0.50	0.78	0.74	0.72	0.77	0.74	0.72	0.76	0.74	0.72	0.76	0.73	0.71	0.71	0.71		
	0.70	0.96	0.94	0.93	0.96	0.94	0.93	0.95	0.94	0.92	0.95	0.93	0.92	0.92	0.92		
	1.00	1.05	1.04	1.03	1.04	1.03	1.03	1.03	1.03	1.02	1.03	1.02	1.02	1.02	1.02		
	1.25	1.05	1.04	1.04	1.04	1.04	1.03	1.04	1.03	1.02	1.03	1.02	1.02	1.02	1.01		
	1.50	1.04	1.03	1.02	1.03	1.02	1.02	1.02	1.02	1.01	1.02	1.01	1.00	1.00	1.00		
	2.00	1.04	1.02	1.01	1.03	1.01	1.00	1.01	1.00	1.00	1.00	0.99	0.99	0.99	0.98		
	2.50	1.04	1.03	1.02	1.03	1.02	1.01	1.02	1.01	1.00	1.00	1.00	1.00	0.99	0.98		
	3.00	1.05	1.04	1.04	1.04	1.03	1.02	1.02	1.02	1.01	1.01	1.01	1.01	1.00	0.99		
	4.00	1.07	1.07	1.06	1.06	1.05	1.05	1.04	1.04	1.04	1.03	1.02	1.02	1.02	1.01		
	5.00	1.09	1.08	1.08	1.07	1.07	1.07	1.05	1.05	1.05	1.04	1.04	1.04	1.04	1.02		
7.00	1.10	1.10	1.10	1.08	1.08	1.08	1.06	1.06	1.07	1.05	1.05	1.05	1.05	1.04			
10.00	1.10	1.11	1.11	1.08	1.09	1.09	1.07	1.07	1.07	1.05	1.05	1.05	1.05	1.04			