

形式	CHC-LED1000NF
----	---------------





光源	LED
定格光束	1300 lm

器具効率	100.0 %
下方効率	100.0 %
上方効率	0.0 %

最大取付間隔			
A断面	1.5	H	
C断面	1.5	H	
B断面	1.5	H	

角度 [deg.]	光度 [cd/1000lm]
0	351
10	345
20	326
30	296
40	257
50	210
60	156
70	98
80	39
90	0
100	0
110	0
120	0
130	0
140	0
150	0
160	0
170	0
180	0

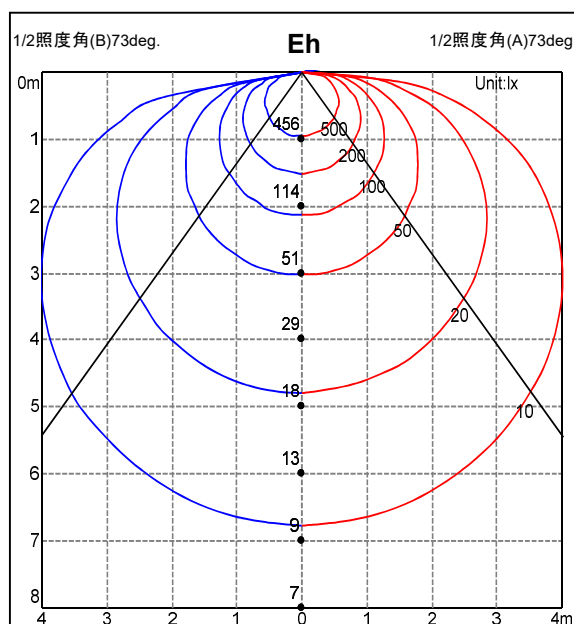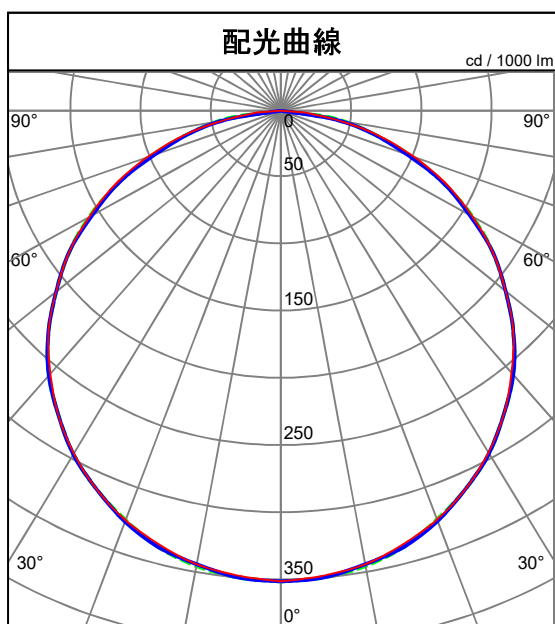

照明率表		平均照度 = 台数 * 照明率 * 保守率 * 1300.0 / (間口 * 奥行)																
床(%)		10																
天井(%)		80				60				40				20				0
壁(%)		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
室 指 数	0.50	0.61	0.56	0.53	0.60	0.56	0.53	0.60	0.55	0.52	0.59	0.55	0.52	0.51				
	0.70	0.75	0.70	0.66	0.74	0.69	0.66	0.73	0.69	0.66	0.72	0.68	0.66	0.65				
	1.00	0.86	0.82	0.79	0.85	0.82	0.79	0.84	0.81	0.79	0.83	0.80	0.78	0.77				
	1.25	0.92	0.89	0.86	0.91	0.88	0.86	0.90	0.87	0.85	0.89	0.86	0.85	0.83				
	1.50	0.96	0.93	0.91	0.95	0.92	0.90	0.93	0.91	0.90	0.92	0.90	0.89	0.88				
	2.00	1.00	0.98	0.97	0.99	0.97	0.96	0.98	0.96	0.95	0.96	0.95	0.94	0.93				
	2.50	1.03	1.01	1.00	1.01	1.00	0.99	1.00	0.99	0.98	0.99	0.98	0.97	0.96				
	3.00	1.04	1.03	1.02	1.03	1.02	1.01	1.01	1.00	1.00	1.00	0.99	0.98	0.97				
	4.00	1.06	1.05	1.04	1.04	1.03	1.03	1.03	1.02	1.01	1.01	1.01	1.00	0.99				
	5.00	1.07	1.06	1.05	1.05	1.04	1.04	1.03	1.03	1.02	1.02	1.01	1.01	0.99				
7.00	1.07	1.07	1.07	1.06	1.05	1.05	1.04	1.03	1.03	1.02	1.02	1.02	1.00					
10.00	1.08	1.08	1.07	1.06	1.06	1.05	1.04	1.04	1.04	1.02	1.02	1.02	1.00					